ToLEDo GLS

ToLEDo GLS V5 FR 806lm 840 B22 BL3

0027880



Product features

- •Compact and elegant design •850lm - suitable for replacing 63W incandescent GLS lamp. •85% energy saving compared to incandescent lamp. •Instant light at the flick of a switch •Uniform light distribution •Colour temperatures - 4000K •Good colour rendering (CRI 80) •Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas •Lower maintenance costs •A+ energy rating - 94 lm/W

PRODUCT OVERVIEW

IPC Code	0027880
Product name	ToLEDo GLS V5 FR 806lm 840 B22 BL3
Technology	LED
Watt (Rated) (W)	8.5
Cap/Base	B22
Fixture rating	Open
General application	Hospitality,Residential & Consumer
Certifications	EUTIE103
ETIM Class	EC001959
Luminous flux (lm)	806
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Wattage (W)	8.5
Product Voltage (V)	230
Average life (Nominal) (h)	15000
Product EAN number	5410288278803

DATA TABLE

General data

IPC Code	0027880
Product name	ToLEDo GLS V5 FR 806lm 840 B22 BL3
Technology	LED
Watt (Rated) (W)	8.5
Cap/Base	B22
Fixture rating	Open
General application	Hospitality,Residential & Consumer
Operating temperature rated (°C)	25
Certifications	EUTIE103
ETIM Class	EC001959

Optical data

Luminous flux (lm)	806

© Feilo Sylvania | Date Printed: 24 Dec 2018

ToLEDo GLS

ToLEDo GLS V5 FR 806lm 840 B22 BL3

0027880

Luminous flux (Rated) (lm)	806
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Beam angle (Rated) (°)	180

Electrical data

Wattage (W)	8.5
Starting time (max) (s)	0.5
Warm-up time to 60% of full light (max) (s)	2
Product Voltage (V)	230
Lamp power factor	0.5
No. Of switching cycles before premature failures	50000
Lamp Energy Label (class)	A+
kWh per 1000 hours burning time	9
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

Physical data

Nominal Product Length (mm)	111
Nominal Product Diameter (mm)	60
Weight (kg)	0.17

Packaging

Single packaging type	Mix blister(20% carton, 80% pl
Product EAN number	5410288278803
Packaging single length / height (cm)	21.4
Packaging single width (cm)	6.5
Packaging single depth (cm)	19.4
DUN14 (inner)	25410288278807
Units per inner package	6
Packaging inner length / height (cm)	41.7
Packaging inner width (cm)	22.6
Packaging inner depth (cm)	21.6
DUN14 (outer)	15410288278800
Units per outer package	12
Packaging outer length / height (cm)	84.5
Packaging outer width (cm)	23.8
Packaging outer depth (cm)	23.7

Safety data

Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Intended purpose	No


© Feilo Sylvania | Date Printed: 24 Dec 2018

ToLEDo GLS

ToLEDo GLS V5 FR 806lm 840 B22 BL3

0027880

Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

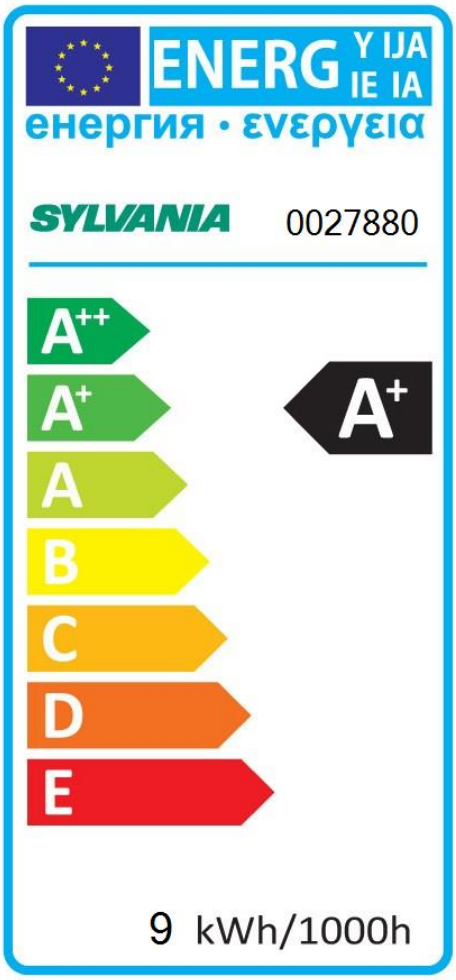

© Feilo Sylvania | Date Printed: 24 Dec 2018