ToLEDo GLS

ToLEDo GLS V4 1921LM 840 E27 SL

0027905



Product features

- •Compact and elegant design ƒ•1921lm - suitable for replacing 121W incandescent GLS lamp. ƒƒ•85% energy saving compared to incandescent lamp. •ƒƒInstant light at the flick of a switch ƒƒ•Uniform light distribution ƒƒ•Colour temperatures - 4000K ƒƒ•Good colour rendering (CRI 80) ƒƒ•Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas ƒƒ•Lower maintenance costs •A+ energy rating - 107 lm/W

PRODUCT OVERVIEW

IPC Code	0027905
Product name	ToLEDo GLS V4 1921LM 840 E27 SL
Technology	LED
Watt (Rated) (W)	17.5
Cap/Base	E27
Fixture rating	Open
General application	Hospitality,Education,Residential & Consumer,
Certifications	EUTIE103
ETIM Class	EC001959
E-number FI	4740570
Luminous flux (lm)	1921
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Wattage (W)	17.5
Product Voltage (V)	230
Average life (Nominal) (h)	15000
Product EAN number	5410288279053

DATA TABLE

General data

IPC Code	0027905
Product name	ToLEDo GLS V4 1921LM 840 E27 SL
Technology	LED
Watt (Rated) (W)	17.5
Cap/Base	E27
Fixture rating	Open
General application	Hospitality,Education,Residential & Consumer,
Operating temperature rated (°C)	25
Certifications	EUTIE103
ETIM Class	EC001959
E-number FI	4740570

© Feilo Sylvania | Date Printed: 24 Dec 2018

ToLEDo GLS

ToLEDo GLS V4 1921LM 840 E27 SL

0027905

Optical data

Luminous flux (lm)	1921
Luminous flux (Rated) (lm)	1921
Colour temperature (K)	4000
Light colour	Cool White
Colour Code	840
CRI (Ra)	80
Beam angle (Rated) (°)	230

Electrical data

Wattage (W)	17.5
Starting time (max) (s)	0.5
Warm-up time to 60% of full light (max) (s)	1
Mains voltage (V)	220-240V~
Product Voltage (V)	230
Lamp power factor	0.5
No. Of switching cycles before premature failures	50000
Lamp Energy Label (class)	A+
kWh per 1000 hours burning time	18
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

Physical data

Nominal Product Length (mm)	143
Nominal Product Diameter (mm)	67
Weight (kg)	0.092

Packaging

Single packaging type	Carton
Product EAN number	5410288279053
Packaging single length / height (cm)	15.7
Packaging single width (cm)	6.9
Packaging single depth (cm)	6.9
DUN14 (inner)	25410288279057
Units per inner package	6
Packaging inner length / height (cm)	21.9
Packaging inner width (cm)	14.6
Packaging inner depth (cm)	16.6
DUN14 (outer)	15410288279050
Units per outer package	60
Packaging outer length / height (cm)	76.7
Packaging outer width (cm)	24.4
Packaging outer depth (cm)	36.2

© Feilo Sylvania | Date Printed: 24 Dec 2018


ToLEDo GLS

ToLEDo GLS V4 1921LM 840 E27 SL

0027905

Safety data

Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Intended purpose	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

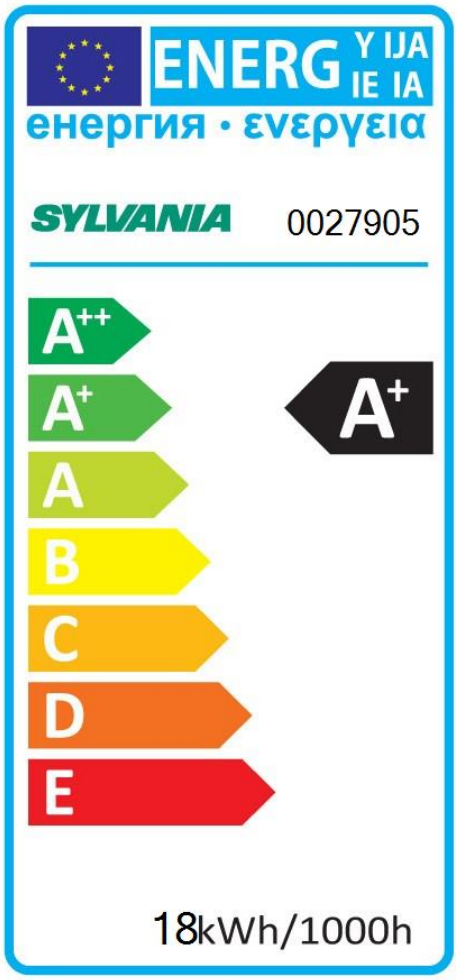

© Feilo Sylvania | Date Printed: 24 Dec 2018