

Start Bulkhead LED IP65 Round

START BULKHEAD LED IP65 ROUND 3K 1450LM

0049182



Product features

- LED exterior bulkhead, round, comes with 2m cable, white polycarbonate body, 1480LM, 18W, 82lm/W, 3000K, Driver Current 135mA, CRI80, , non-dimmable, IP65, IK08, 25000hrs (L70), (LxWxD) 324x324x80mm



PRODUCT OVERVIEW

IPC Code	0049182
Product name	START BULKHEAD LED IP65 ROUND 3K 1450LM
Technology	LED
Housing	PC
Mount	Surface Mounted
General application	Logistics & Industry, Residential & Consumer,
Certifications	EUNEW009
ETIM Class	EC002892
E-number SE	7505120
Fixture luminous flux (lm)	1480
Luminous flux (lm)	1480
Luminaire efficacy (lm/W)	82.2
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	Group 1
Total power consumption (W)	18
Electrical protection	Class II
Dimmable	No
Housing colour	White
IP rating	IP65
IK rating	IK08
Product EAN number	5410288491820
Lamps	No
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	0049182
Product name	START BULKHEAD LED IP65 ROUND 3K 1450LM

Start Bulkhead LED IP65 Round

START BULKHEAD LED IP65 ROUND 3K 1450LM
0049182

Technology	LED
Housing	PC
Mount	Surface Mounted
General application	Logistics & Industry, Residential & Consumer,
Certifications	EUNEW009
ETIM Class	EC002892
E-number SE	7505120

Optical data

Fixture luminous flux (lm)	1480
Luminous flux (lm)	1480
Luminaire efficacy (lm/W)	82.2
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	Group 1

Electrical data

Total power consumption (W)	18
Current (A)	0.09
Mains voltage (V)	220-240V~
Electrical protection	Class II
Dimmable	No
Inrush Duration (µs)	600
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	18
Max. Luminaires per 16A C Breaker	30

Lifetime data

Lumen maintenance - L70 B50	25000
Lumen maintenance - L70 B20	23000
Lumen maintenance - L70 B10	21000
Lumen maintenance - L80 B50	19000
Lumen maintenance - L80 B20	17500
Lumen maintenance - L80 B10	16000

Physical data

Housing colour	White
IP rating	IP65
IK rating	IK08
Diffuser finish	Opal
Diffuser material	PC
Nominal Product Length (mm)	80.5
Nominal Product Width (mm)	324
Nominal Product Height (mm)	324
Weight (kg)	1.035

Start Bulkhead LED IP65 Round

START BULKHEAD LED IP65 ROUND 3K 1450LM
0049182



Packaging

Single packaging type	Carton
Product EAN number	5410288491820
Packaging single length / height (cm)	33.5
Packaging single width (cm)	11.5
Packaging single depth (cm)	33.5
DUN14 (outer)	15410288491827
Units per outer package	6
Packaging outer length / height (cm)	69.0
Packaging outer width (cm)	36.5
Packaging outer depth (cm)	35.5


Safety data

Optimal operating condition (°C)	-10-40
----------------------------------	--------

PHOTOMETRY

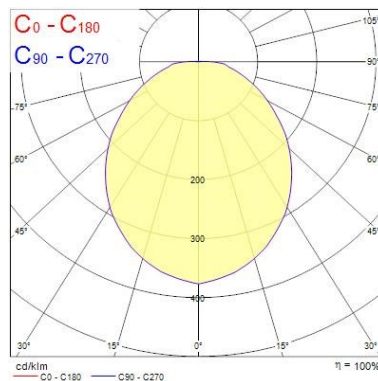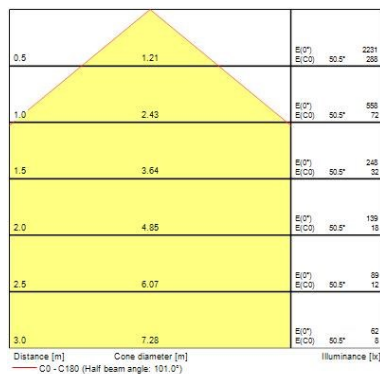

TECHNICAL DRAWINGS



Start Bulkhead LED IP65 Round START BULKHEAD LED IP65 ROUND 3K 1450LM 0049182

SYLVANIA 0049182

 This luminaire contains built in LED lamps.


 } L
E
D

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.


 } L
E
D

The lamps cannot be changed in the luminaire.

SYLVANIA 0049182  874/2012