ToLEDo Superia T8 CCG and AC

ToLEDo SUPERIA T8 V5 2FT 1050LM 865

0028384

Product features

- • A range of high performance ToLEDo Superia T8 LED tubes with reminiscent look of fluorescent tubes • High performance glass construction design • High lumen output, with an impressive lumen efficacy of 171 lm/W • Omnidirectional light distribution (320°) and wide beam angle (220°) • A++ energy rating and low power consumption • Average rated life of 50,000 hours (L70 F50) • Lamp length - 600mm • High power factor 0.90 • 200,000 switching cycle • 5 years guarantee for complete peace of mind • Compatible with electromagnetic gear and also suitable for direct mains operation (220-240V) • No bending or discoloration over time • Suitable for general illumination in offices, supermarkets, department stores, train stations, petrol stations, parking lots, waterproof luminaires and maintenance free applications

PRODUCT OVERVIEW

IPC Code	0028384
Product name	ToLEDo SUPERIA T8 V5 2FT 1050LM 865
Technology	LED
Watt (Rated) (W)	6.5
Cap/Base	G13
General application	Hospitality,Logistics & Industry,Residential & Consumer,
Certifications	EUERL010
ETIM Class	EC001959
E-number FI	4740717
Luminous flux (lm)	1110
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Wattage (W)	6.5
Product Voltage (V)	230
Average life (Nominal) (h)	50000
Product EAN number	5410288283845

DATA TABLE

General data

IPC Code	0028384
Product name	ToLEDo SUPERIA T8 V5 2FT 1050LM 865
Technology	LED
Watt (Rated) (W)	6.5
Cap/Base	G13
General application	Hospitality,Logistics & Industry,Residential & Consumer,
Certifications	EUERL010
ETIM Class	EC001959
E-number FI	4740717

Optical data

Luminous flux (lm)	1110

© Feilo Sylvania | Date Printed: 26 Dec 2018

ToLEDo Superia T8 CCG and AC

ToLEDo SUPERIA T8 V5 2FT 1050LM 865

0028384

Luminous flux (Rated) (lm)	1110
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	6.5
Starting time (max) (s)	0.5
Warm-up time to 60% of full light (max) (s)	0.5
Product Voltage (V)	230
Lamp power factor	0.9
No. Of switching cycles before premature failures	200000
Lamp Energy Label (class)	A++
kWh per 1000 hours burning time	7

Lifetime data

Average life (Nominal) (h)	50000
Average life (Rated) (h)	50000

Physical data

Weight (kg)	0.115

Packaging

Single packaging type	Carton
Product EAN number	5410288283845
Packaging single length / height (cm)	64.5
Packaging single width (cm)	2.75
Packaging single depth (cm)	2.75
DUN14 (outer)	15410288283842
Units per outer package	10
Packaging outer length / height (cm)	68.7
Packaging outer width (cm)	22.6
Packaging outer depth (cm)	11.7

Safety data


Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Suitable for household illumination	Yes
Safety message	Suitable for totally enclosed fixture

© Feilo Sylvania | Date Printed: 26 Dec 2018

ToLEDo Superia T8 CCG and AC

ToLEDo SUPERIA T8 V5 2FT 1050LM 865

0028384

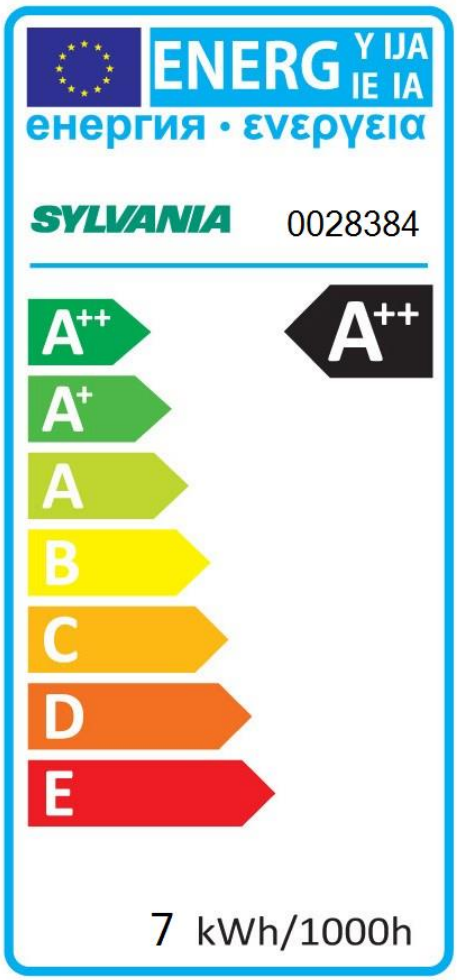

© Feilo Sylvania | Date Printed: 26 Dec 2018