ToLEDo Micro-Lynx

ToLEDo MicroLynx Frosted 250LM 830

0026783

Product features

- The microlynx LED FROSTED W aims to replace a GX53 CFL lamp. This product with a 15,000 hours life is available in 3000 Kelvin color, and will deliver 250lm instantanely. Perfect for kitchen or bathroom this product is 3 years warranty for a complete peace of mind.

PRODUCT OVERVIEW

IPC Code	0026783
Product name	ToLEDo MicroLynx Frosted 250LM 830
Technology	LED
Watt (Rated) (W)	3
Lamp shape	Micro-Lynx LED
Cap/Base	GX53
Lamp finish	frosted
Fixture rating	Open
General application	Hospitality,Residential & Consumer
Certifications	EUTIE103
ETIM Class	EC001959
E-number FI	4740047
E-number SE	8359424
E-number Norway	3845384
Fixture luminous flux (lm)	RPLA01 : Royalty LED Lamp Single Colour
Luminous flux (lm)	250
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	6
Wattage (W)	3
Average life (Nominal) (h)	15000
Product EAN number	5410288267838
Chromaticity coordinate Y	-1

DATA TABLE

General data

IPC Code	0026783
Product name	ToLEDo MicroLynx Frosted 250LM 830
Technology	LED
Watt (Rated) (W)	3
Lamp shape	Micro-Lynx LED
Cap/Base	GX53

© Feilo Sylvania | Date Printed: 26 Dec 2018

ToLEDo Micro-Lynx

ToLEDo MicroLynx Frosted 250LM 830

0026783

Lamp finish	frosted
Fixture rating	Open
General application	Hospitality,Residential & Consumer
Operating temperature range (°C)	24.5
Certifications	EUTIE103
ETIM Class	EC001959
E-number FI	4740047
E-number SE	8359424
E-number Norway	3845384

Optical data

Fixture luminous flux (lm)	RPLA01 : Royalty LED Lamp Single Colour
Luminous flux (lm)	250
Luminous flux (Rated) (lm)	250
Rated lamp efficacy 100h HF at 25°C (lm/W)	62.50
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	6
Adjustable chromaticity	N
Lumen maintenance at end of nominal life (%)	80

Electrical data

Wattage (W)	3
Equivalent watt (W)	25
Starting time (max) (s)	0.05
Warm-up time to 60% of full light (max) (s)	< 1s => 60%
Current (A)	0.03
Mains voltage (V)	220-240V~
Lamp power factor	0.5
Control gear required	No
No. Of switching cycles before premature failures	>50000
Transformer required	No
Drive current (mA)	21
Lamp Energy Label (class)	A++
Energy efficiency level	A+
kWh per 1000 hours burning time	4

Lifetime data

Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

Physical data

Nominal Product Diameter (mm)	25
Max. Lamp Diameter (mm) - D	75
Weight (kg)	0.045

© Feilo Sylvania | Date Printed: 26 Dec 2018

ToLEDo Micro-Lynx

ToLEDo MicroLynx Frosted 250LM 830

0026783


Packaging

Single packaging type	Carton
Product EAN number	5410288267838
Packaging single length / height (cm)	7.7
Packaging single width (cm)	3.7
Packaging single depth (cm)	7.6
DUN14 (inner)	15410288267835
Units per inner package	6
Packaging inner length / height (cm)	16.27
Packaging inner width (cm)	12.4
Packaging inner depth (cm)	10.77
DUN14 (outer)	35410288267839
Units per outer package	60
Packaging outer length / height (cm)	66.0
Packaging outer width (cm)	17.9
Packaging outer depth (cm)	24.6

Safety data

Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Intended purpose	No
Suitable for household illumination	Yes

TECHNICAL DRAWINGS




Dimensions (mm)

© Feilo Sylvania | Date Printed: 26 Dec 2018

ToLEDo Micro-Lynx

ToLEDo MicroLynx Frosted 250LM 830

0026783

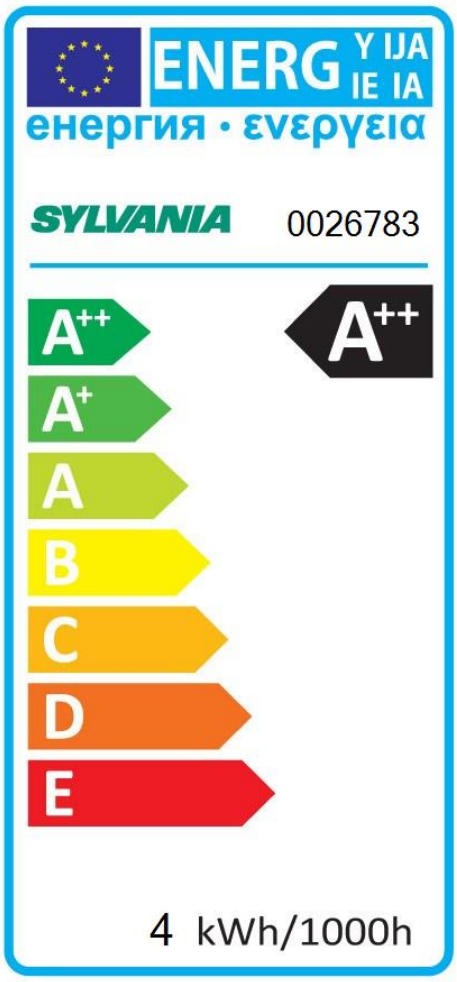

© Feilo Sylvania | Date Printed: 26 Dec 2018