ToLEDo Retro ST64 Dimmable

ToLEDo RT ST64 V2 GL DIM 560LM 824 E27 S

0027506



Product features

- • Perfect for decorative and general lighting applications and creates a warm ambiance similar to traditional lamps • Same look, size and functionality as incandescent lamps. • The combination of innovative filament chip technology and dimming functionality make it an ideal solution for both hospitality application and for general lighting. • Suitable for replacement of 45W incandescent lamp. • A++ energy rating - 102 lm/W • Dimming functionality helps to vary lighting scene as lamps can be dimmed from 100% to 10% and reduces energy consumption as well. • Sparkling light output. • Omni-directional light distribution. • Environment friendly - no mercury and lower CO2 emissions. • Dimmable on approved dimmers. • Color temperature - 2400K Candlelight

PRODUCT OVERVIEW

IPC Code	0027506
Product name	ToLEDo RT ST64 V2 GL DIM 560LM 824 E27 S
Technology	LED
Watt (Rated) (W)	5.5
Lamp shape	ST64
Fixture rating	Open
General application	Hospitality,Residential & Consumer
Certifications	EUTIE103
ETIM Class	EC001959
E-number FI	4740578
E-number SE	8292841
Luminous flux (lm)	560
Colour temperature (K)	2400
Light colour	Candlelight
CRI (Ra)	80
Wattage (W)	5.5
Product Voltage (V)	230
Average life (Nominal) (h)	15000
Product EAN number	5410288275062

DATA TABLE

General data

IPC Code	0027506
Product name	ToLEDo RT ST64 V2 GL DIM 560LM 824 E27 S
Technology	LED
Watt (Rated) (W)	5.5
Lamp shape	ST64
Fixture rating	Open
General application	Hospitality,Residential & Consumer
Operating temperature rated (°C)	25
Certifications	EUTIE103
ETIM Class	EC001959
E-number FI	4740578

© Feilo Sylvania | Date Printed: 26 Dec 2018

ToLEDo Retro ST64 Dimmable

ToLEDo RT ST64 V2 GL DIM 560LM 824 E27 S

0027506

E-number SE	8292841

Optical data

Luminous flux (lm)	560
Luminous flux (Rated) (lm)	560
Colour temperature (K)	2400
Light colour	Candlelight
Colour Code	824
CRI (Ra)	80
Adjustable chromaticity	N
Beam angle (Rated) (°)	320

Electrical data

Wattage (W)	5.5
Starting time (max) (s)	0.5
Warm-up time to 60% of full light (max) (s)	1
Product Voltage (V)	230
Lamp power factor	0.8
No. Of switching cycles before premature failures	50000
Transformer required	Yes
Lamp Energy Label (class)	A+
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

Physical data

Nominal Product Length (mm)	143
Nominal Product Diameter (mm)	64
Weight (kg)	0.045

Packaging

Single packaging type	Carton
Product EAN number	5410288275062
Packaging single length / height (cm)	16.0
Packaging single width (cm)	7.0
Packaging single depth (cm)	7.0
DUN14 (inner)	25410288275066
Units per inner package	6
Packaging inner length / height (cm)	21.5
Packaging inner width (cm)	14.51
Packaging inner depth (cm)	16.5
DUN14 (outer)	15410288275069
Units per outer package	60
Packaging outer length / height (cm)	71.0
Packaging outer width (cm)	22.3

© Feilo Sylvania | Date Printed: 26 Dec 2018

ToLEDo Retro ST64 Dimmable

ToLEDo RT ST64 V2 GL DIM 560LM 824 E27 S


0027506


Packaging outer depth (cm)	36.0


Safety data


Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

PHOTOMETRY

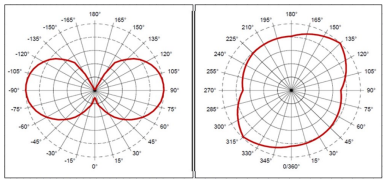


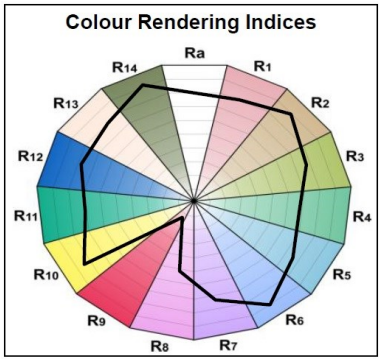

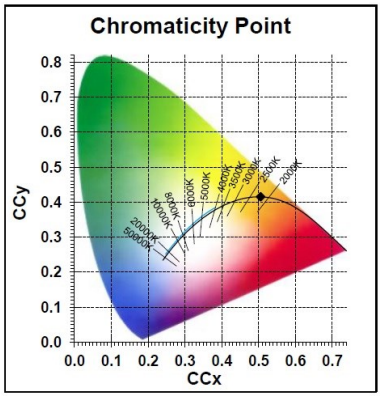

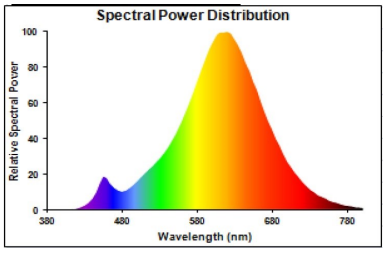

TECHNICAL DRAWINGS




© Feilo Sylvania | Date Printed: 26 Dec 2018

ToLEDo Retro ST64 Dimmable

ToLEDo RT ST64 V2 GL DIM 560LM 824 E27 S

0027506

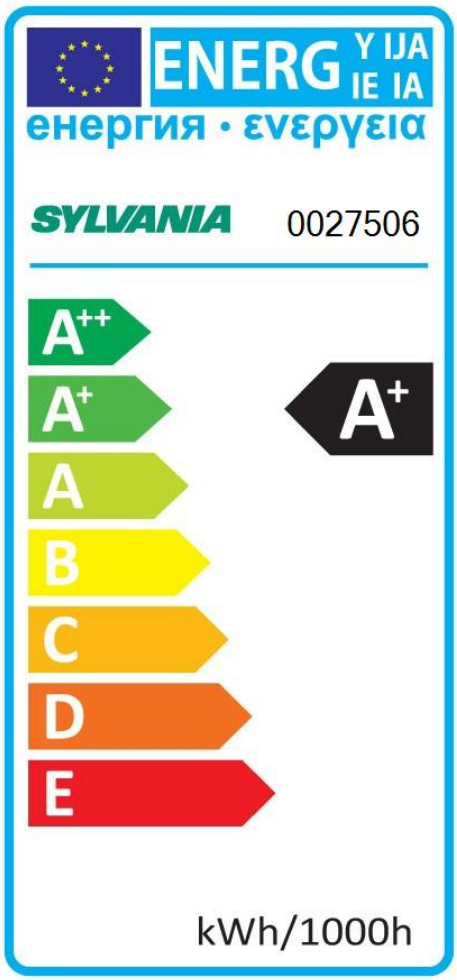

© Feilo Sylvania | Date Printed: 26 Dec 2018