

Ascent 150 II Round Aluminium Reflector

ASCENT 150 II 1600 3K STD EM

2059350



Product features

- The ASCENT 150 II 1600 3K STD EM is a high efficient downlight luminaire with luminous flux: 1600lm, luminaire efficacy: 113lm/W, Colour rendering index Ra >80, Colour temperature: 3000K Warm white, Average life rated at 50,000Hrs, Class II, Protection rating IP44/IK02, Cut out dimensions: 176mm, Weight: 2.45kg



PRODUCT OVERVIEW

IPC Code	2059350
Product name	ASCENT 150 II 1600 3K STD EM
Technology	LED
Housing	Aluminium
Mount	Recessed
Environment	Internal
General application	Hospitality, Office, Retail
Certifications	EUNEW001
ETIM Class	EC001744
Fixture luminous flux (lm)	1600
Luminaire efficacy (lm/W)	113
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Photobiological Risk Group	Exempt Group 0
Total power consumption (W)	14
Electrical protection	Class II
Control gear type	Electronic
Average life (Nominal) (h)	50000
IP rating	IP44
IK rating	IK02
Product EAN number	5025768593507
Luminous flux (emergency) (lm)	352
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2059350
Product name	ASCENT 150 II 1600 3K STD EM
Technology	LED

Ascent 150 II Round Aluminium Reflector

ASCENT 150 II 1600 3K STD EM
2059350

Housing	Aluminium
Mount	Recessed
Environment	Internal
General application	Hospitality, Office, Retail
Certifications	EUNEW001
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	1600
Luminaire efficacy (lm/W)	113
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam angle (Rated) (°)	80
Distribution type	Direct
Photobiological Risk Group	Exempt Group 0
Emergency duration (h)	3

Electrical data

Total power consumption (W)	14
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear type	Electronic
Transformer required	Yes
Inrush Current (A)	45
Inrush Duration (µs)	20
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60/HF
Max. Luminaires per 16A C Breaker	80

Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Lumen maintenance - L90 B20	60000
Lumen maintenance - L90 B10	52000
Average life (Nominal) (h)	50000

Physical data

IP rating	IP44
IK rating	IK02
Diffuser finish	Clear
Nominal Product Width (mm)	189

Ascent 150 II Round Aluminium Reflector


ASCENT 150 II 1600 3K STD EM
2059350

Nominal Product Height (mm)	142
Weight (kg)	2.45
Recessed Depth (mm)	142

Packaging


Single packaging type	Carton
Product EAN number	5025768593507
Packaging single length / height (cm)	30.0
Packaging single width (cm)	30.0
Packaging single depth (cm)	20.0
DUN14 (outer)	05025768593507
Units per outer package	1
Packaging outer length / height (cm)	30.0
Packaging outer width (cm)	30.0
Packaging outer depth (cm)	20.0

PHOTOMETRY

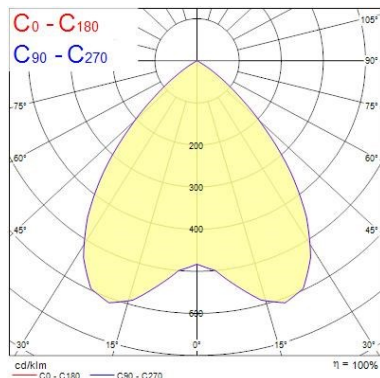

0.5	0.89	E(0°) E(C0)	41.8°	886 177
1.0	1.79	E(0°) E(C0)	41.8°	172 44
1.5	2.68	E(0°) E(C0)	41.8°	76 20
2.0	3.58	E(0°) E(C0)	41.8°	43 11
2.5	4.47	E(0°) E(C0)	41.8°	27 7
3.0	5.36	E(0°) E(C0)	41.8°	19 5

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 83.6°) Illuminance [lx]

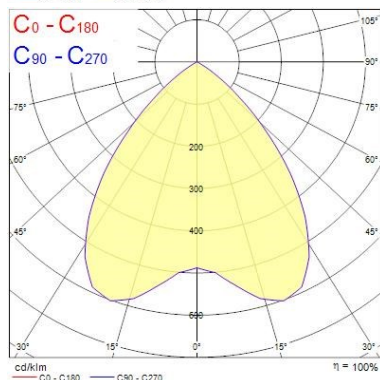


0.5	0.89	E(0°) E(C0)	41.7°	3091 616
1.0	1.78	E(0°) E(C0)	41.7°	773 204
1.5	2.67	E(0°) E(C0)	41.7°	343 91
2.0	3.56	E(0°) E(C0)	41.7°	190 51
2.5	4.45	E(0°) E(C0)	41.7°	134 33
3.0	5.35	E(0°) E(C0)	41.7°	88 23

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 83.4°) Illuminance [lx]

TECHNICAL DRAWINGS

Ascent 150 II Round Aluminium Reflector


ASCENT 150 II 1600 3K STD EM
2059350



Concord 2059350



This luminaire contains built in LED lamps.

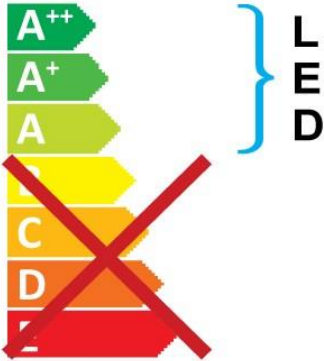

The lamps cannot be changed in the luminaire.

874/2012


Ascent 150 II Round Aluminium Reflector

ASCENT 150 II 1600 3K STD EM
2059350

