


## Ascent 150 II Round White Reflector

ASCENT 150 II 2100 4K DALI WHT  
2059448



### Product features

- The ASCENT 150 II 2100 4K DALI WHT is a high efficient downlight luminaire with luminous flux: 2413, luminaire efficacy: 127, Colour rendering index Ra >80, Colour temperature: 4000K Neutral White, Average life rated at 50,000Hrs, Class II, Protection rating IP44/IK02, Cut out dimensions: 176mm, Weight: 1.7kg



### PRODUCT OVERVIEW

IPC Code	2059448
Product name	ASCENT 150 II 2100 4K DALI WHT
Technology	LED
Housing	Aluminium
Mount	Recessed
Environment	Internal
General application	Hospitality,Office,Retail
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (lm)	2413
Luminaire efficacy (lm/W)	127
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Photobiological Risk Group	Exempt Group 0
Total power consumption (W)	19
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	99
Average life (Nominal) (h)	50000
IP rating	IP44
IK rating	IK02
Product EAN number	5025768594481
Included lamp	INTEGRATED LED

### DATA TABLE

#### General data

IPC Code	2059448
Product name	ASCENT 150 II 2100 4K DALI WHT
Technology	LED
Housing	Aluminium
Mount	Recessed
Environment	Internal

## Ascent 150 II Round White Reflector

*ASCENT 150 II 2100 4K DALI WHT*  
2059448

<b>General application</b>	Hospitality,Office,Retail
<b>Certifications</b>	EUNEW008
<b>ETIM Class</b>	EC001744

### Optical data

<b>Fixture luminous flux (lm)</b>	2413
<b>Luminaire efficacy (lm/W)</b>	127
<b>LOR (%)</b>	100
<b>Colour temperature (K)</b>	4000
<b>CRI (Ra)</b>	80
<b>Colour Consistency (SDCM)</b>	3
<b>Adjustable chromaticity</b>	N
<b>Beam angle (Rated) (°)</b>	80
<b>Distribution type</b>	Direct
<b>Photobiological Risk Group</b>	Exempt Group 0

### Electrical data

<b>Total power consumption (W)</b>	19
<b>Mains voltage (V)</b>	220-240V~
<b>Electrical protection</b>	Class II
<b>Control gear type</b>	Electronic
<b>Transformer required</b>	Yes
<b>Minimum dimming level (%)</b>	99
<b>Inrush Current (A)</b>	20.9
<b>Inrush Duration (µs)</b>	139
<b>Glow Wire Test (°C)</b>	650
<b>Nominal Frequency (Hz)</b>	50/60/HF
<b>Max. Luminaires per 16A C Breaker</b>	48

### Lifetime data

<b>Lumen maintenance - L70 B50</b>	60000
<b>Lumen maintenance - L70 B20</b>	60000
<b>Lumen maintenance - L70 B10</b>	60000
<b>Lumen maintenance - L80 B50</b>	60000
<b>Lumen maintenance - L80 B20</b>	60000
<b>Lumen maintenance - L80 B10</b>	60000
<b>Lumen maintenance - L90 B50</b>	60000
<b>Lumen maintenance - L90 B20</b>	60000
<b>Lumen maintenance - L90 B10</b>	52000
<b>Average life (Nominal) (h)</b>	50000

### Physical data

<b>IP rating</b>	IP44
<b>IK rating</b>	IK02
<b>Diffuser finish</b>	Clear
<b>Nominal Product Width (mm)</b>	188
<b>Nominal Product Height (mm)</b>	158
<b>Weight (kg)</b>	1.7
<b>Recessed Depth (mm)</b>	142


## Ascent 150 II Round White Reflector

ASCENT 150 II 2100 4K DALI WHT  
2059448

### Packaging

Single packaging type	Carton
Product EAN number	5025768594481
Packaging single length / height (cm)	25.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	25.0
DUN14 (outer)	05025768594481
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	20.0
Packaging outer depth (cm)	25.0

### PHOTOMETRY

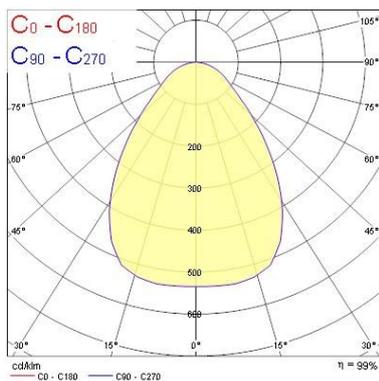

Distance [m]	Cone diameter [m]	E <sub>D</sub> [lx]	E <sub>CQ</sub> [lx]
0.5	0.82	618	192
1.0	1.65	129	28
1.5	2.47	53	12
2.0	3.30	32	7
2.5	4.12	20	4
3.0	4.95	14	3

Distance [m]    Cone diameter [m]    Illuminance [lx]  
C0 - C180 (Half beam angle: 79.0°)

## Ascent 150 II Round White Reflector ASCENT 150 II 2100 4K DALI WHT 2059448

**Concord** 2059448

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

**Concord** 2059448  874/2012