Ascent 150 Square Wallwasher 4K

ASCENT 150 SQWW 1100 4K STD

2055992



Product features

- The ASCENT 150 SQWW 1100 4K STD is a high efficient downlight luminaire with luminous flux: 1195lm, luminaire efficacy: 54lm/W, Colour rendering index Ra >80, Colour temperature: 4000K Neutral white, Average life rated at 50,000Hrs, Class II, Protection rating IP44/IK02, Cut out dimensions: 175x175mm, Weight: 1.7kg

PRODUCT OVERVIEW

IPC Code	2055992
Product name	ASCENT 150 SQWW 1100 4K STD
Technology	LED
Housing	Aluminium
Mount	Recessed
Environment	Internal
General application	Hospitality,Office,Retail
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4278897
Fixture luminous flux (lm)	1195
Luminous flux (lm)	1195
Luminaire efficacy (lm/W)	54
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	30
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	347
Total power consumption (W)	22
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Integral
Average life (Nominal) (h)	50000
IP rating	IP44
IK rating	IK02
Product EAN number	5025768559923
Included lamp	INTEGRATED LED

DATA TABLE

© Feilo Sylvania | Date Printed: 27 Dec 2018

Ascent 150 Square Wallwasher 4K

ASCENT 150 SQWW 1100 4K STD

2055992

General data

IPC Code	2055992
Product name	ASCENT 150 SQWW 1100 4K STD
Technology	LED
Housing	Aluminium
Mount	Recessed
Environment	Internal
General application	Hospitality,Office,Retail
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4278897

Optical data

Fixture luminous flux (lm)	1195
Luminous flux (lm)	1195
Luminaire efficacy (lm/W)	54
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Asymmetric
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	347

Electrical data

Total power consumption (W)	22
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Integral
Drive current (mA)	700
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lumen maintenance - L70 B50	50000
Average life (Nominal) (h)	50000

Physical data

IP rating	IP44
IK rating	IK02
Diffuser finish	Clear
Diffuser material	Glass
Reflector finish	Aluminium
Nominal Product Length (mm)	188
Nominal Product Width (mm)	188
Nominal Product Height (mm)	145

© Feilo Sylvania | Date Printed: 27 Dec 2018

Ascent 150 Square Wallwasher 4K

ASCENT 150 SQWW 1100 4K STD

2055992


Weight (kg)	0.975
Recessed Depth (mm)	158

Packaging

Single packaging type	Carton
Product EAN number	5025768559923
Packaging single length / height (cm)	25.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	25.0
DUN14 (outer)	05025768559923
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	20.0
Packaging outer depth (cm)	25.0

PHOTOMETRY

TECHNICAL DRAWINGS





© Feilo Sylvania | Date Printed: 27 Dec 2018

Ascent 150 Square Wallwasher 4K

ASCENT 150 SQWW 1100 4K STD

2055992

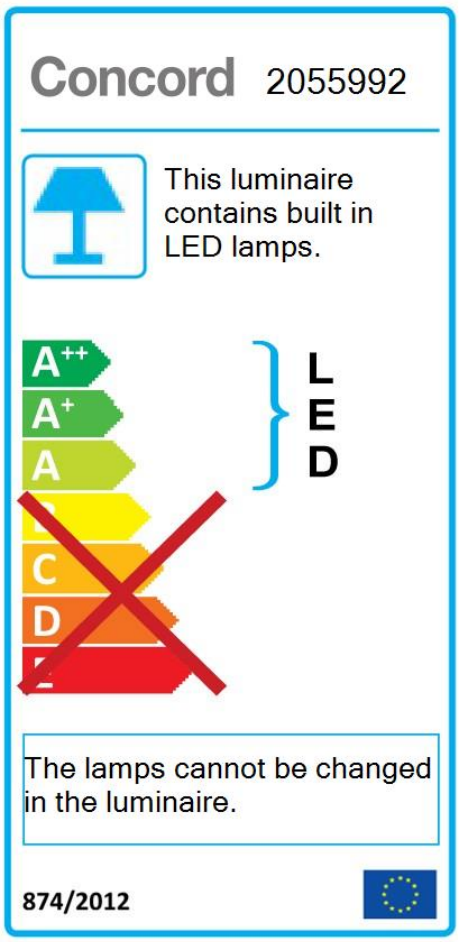

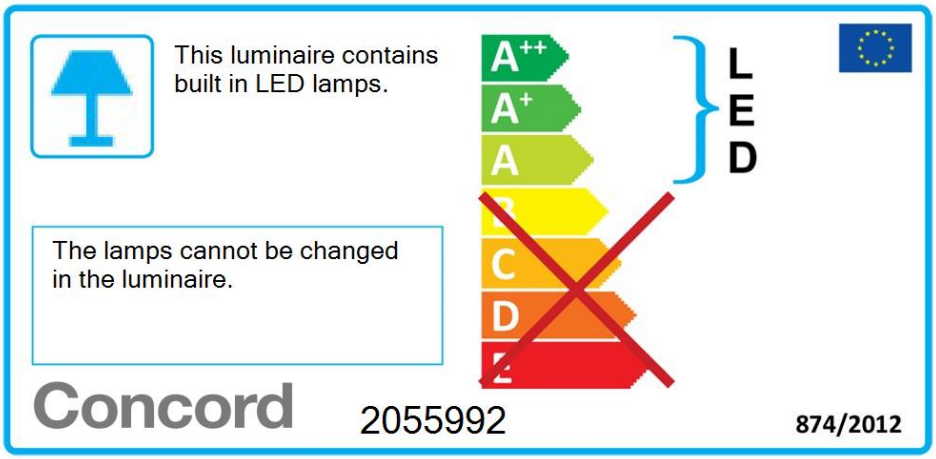

© Feilo Sylvania | Date Printed: 27 Dec 2018