

Ascent 150 Square Wallwasher 4K

ASCENT 150 SQWW 1500 4K DALI

2055997



Product features

- The ASCENT 150 SQWW 1500 4K DALI is a high efficient downlight luminaire with luminous flux: 1557lm, luminaire efficacy: 52lm/W, Colour rendering index Ra >80, Colour temperature: 4000K Neutral white, Average life rated at 50,000Hrs, Class II, Protection rating IP44/IK02, Cut out dimensions: 175x175mm, Weight: 1.7kg



PRODUCT OVERVIEW

IPC Code	2055997
Product name	ASCENT 150 SQWW 1500 4K DALI
Technology	LED
Housing	Aluminium
Mount	Recessed
Environment	Internal
General application	Hospitality,Office,Retail
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4280803
Fixture luminous flux (lm)	1557
Luminous flux (lm)	1557
Luminaire efficacy (lm/W)	52
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	30
Photobiological Risk Group	-
Total power consumption (W)	30
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Integral
Minimum dimming level (%)	99
Average life (Nominal) (h)	50000
IP rating	IP44
IK rating	IK02
Product EAN number	5025768559978
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2055997
----------	---------

Ascent 150 Square Wallwasher 4K

ASCENT 150 SQWW 1500 4K DALI
2055997

Product name	ASCENT 150 SQWW 1500 4K DALI
Technology	LED
Housing	Aluminium
Mount	Recessed
Environment	Internal
General application	Hospitality,Office,Retail
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4280803

Optical data

Fixture luminous flux (lm)	1557
Luminous flux (lm)	1557
Luminaire efficacy (lm/W)	52
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Asymmetric
Photobiological Risk Group	-

Electrical data

Total power consumption (W)	30
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Integral
Minimum dimming level (%)	99
Drive current (mA)	1000
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lumen maintenance - L70 B50	50000
Average life (Nominal) (h)	50000

Physical data

IP rating	IP44
IK rating	IK02
Diffuser finish	Clear
Diffuser material	Glass
Reflector finish	Aluminium
Nominal Product Length (mm)	188
Nominal Product Width (mm)	188
Nominal Product Height (mm)	145
Weight (kg)	0.975
Recessed Depth (mm)	158


Ascent 150 Square Wallwasher 4K

ASCENT 150 SQWW 1500 4K DALI
2055997

Packaging

Single packaging type	Carton
Product EAN number	5025768559978
Packaging single length / height (cm)	25.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	25.0
DUN14 (outer)	05025768559978
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	20.0
Packaging outer depth (cm)	25.0

PHOTOMETRY

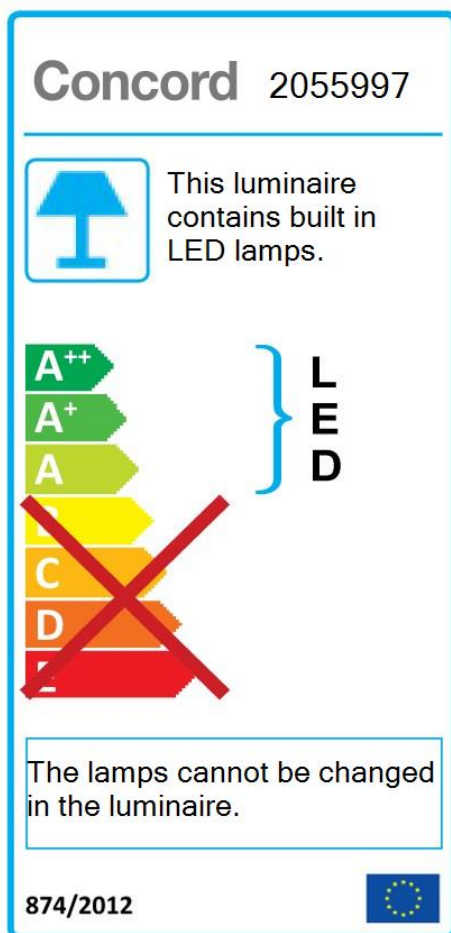

Ascent 150 Square Wallwasher 4K

ASCENT 150 SQWW 1500 4K DALI
2055997

