

START Surface IP66

START SURFACE IK10 BLACK SENSORDIM IP66 960LM 830

0049288



Product features

- Sensor Dim LED exterior surface mounted luminaire, 960LM, 11W power consumption, 87lm/W efficacy, 3000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), black housing, vandal resistant



PRODUCT OVERVIEW

IPC Code	0049288
Product name	START SURFACE IK10 BLACK SENSORDIM IP66 960LM 830
Technology	LED
Housing	PC
General application	Residential & Consumer, Logistics & Industry,
Certifications	EUNEW009
ETIM Class	EC002892
E-number FI	4274702
E-number SE	7505132
Fixture luminous flux (lm)	957
Luminaire efficacy (lm/W)	87
Colour temperature (K)	3000
CRI (Ra)	80
Beam Angle (°)	110
Photobiological Risk Group	Group 0
Total power consumption (W)	11
Electrical protection	Class II
LED Flickering Rate	High (>40%)
Housing colour	Black - 9011
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492889
Lamps	Yes

DATA TABLE

General data

IPC Code	0049288
Product name	START SURFACE IK10 BLACK SENSORDIM IP66 960LM 830
Technology	LED
Housing	PC
General application	Residential & Consumer, Logistics & Industry,
Operating temperature range (°C)	(-)20 To 45
Certifications	EUNEW009
ETIM Class	EC002892

START Surface IP66

START SURFACE IK10 BLACK SENSORDIM IP66 960LM 830
0049288

E-number FI	4274702
E-number SE	7505132

Optical data

Fixture luminous flux (lm)	957
Luminaire efficacy (lm/W)	87
Colour temperature (K)	3000
CRI (Ra)	80
Beam Angle (°)	110
Photobiological Risk Group	Group 0

Electrical data

Total power consumption (W)	11
Mains voltage (V)	220-240V~
Electrical protection	Class II
Drive current (mA)	350
Inrush Current (A)	5.6
Inrush Duration (µs)	124
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	High (>40%)
Max. Luminaires per 10A C Breaker	80
Max. Luminaires per 13A C Breaker	105
Max. Luminaires per 16A C Breaker	150
Max. Luminaires per 20A C Breaker	200
Max. Luminaires per 10A B Breaker	60
Max. Luminaires per 13A B Breaker	78
Max. Luminaires per 16A B Breaker	96
Max. Luminaires per 20A B Breaker	120

Lifetime data

Lumen maintenance - L70 B50	50000
Lumen maintenance - L70 B20	40000
Lumen maintenance - L70 B10	30000
Lumen maintenance - L80 B50	30000
Lumen maintenance - L80 B20	20000
Lumen maintenance - L80 B10	18000
Lumen maintenance - L90 B50	15000
Lumen maintenance - L90 B20	12000
Lumen maintenance - L90 B10	8000

Physical data

Housing colour	Black - 9011
IP rating	IP66
IK rating	IK10
Nominal Product Length (mm)	300
Nominal Product Width (mm)	300
Nominal Product Height (mm)	90
Nominal Product Diameter (mm)	300

START Surface IP66

START SURFACE IK10 BLACK SENSORDIM IP66 960LM 830

0049288

Weight (kg) 0.78


Packaging

Single packaging type	Carton
Product EAN number	5410288492889
Packaging single length / height (cm)	30.2
Packaging single width (cm)	9.9
Packaging single depth (cm)	30.5
DUN14 (outer)	15410288492886
Units per outer package	6
Packaging outer length / height (cm)	61.5
Packaging outer width (cm)	31.0
Packaging outer depth (cm)	32.0


PHOTOMETRY

0.5	1.48	E(0°) E(C0) 55.9°	1238 109
1.0	2.95	E(0°) E(C0) 55.9°	309 27
1.5	4.43	E(0°) E(C0) 55.9°	137 12
2.0	5.91	E(0°) E(C0) 55.9°	77 7
2.5	7.38	E(0°) E(C0) 55.9°	49 4
3.0	8.86	E(0°) E(C0) 55.9°	34 3

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 111.8°)

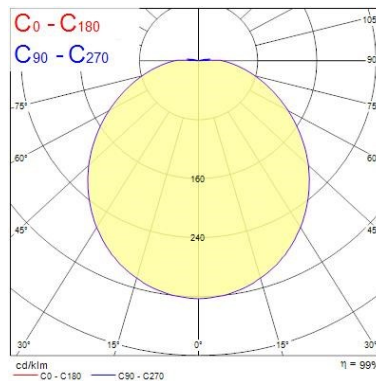

TECHNICAL DRAWINGS




START Surface IP66

START SURFACE IK10 BLACK SENSORDIM IP66 960LM 830
0049288

SYLVANIA 0049288


 This luminaire contains built in LED lamps.

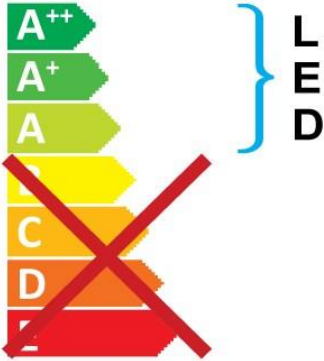

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

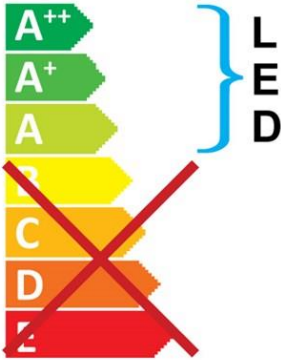

The lamps cannot be changed in the luminaire.

SYLVANIA 0049288  874/2012