

## Start Tubular - Electronic

Start Tubular IP66 228 EB 840  
0042344



### PRODUCT OVERVIEW

|                             |                                   |
|-----------------------------|-----------------------------------|
| IPC Code                    | 0042344                           |
| Product name                | Start Tubular IP66 228 EB 840     |
| Technology                  | Fluorescent                       |
| Housing                     | Polycarbonate                     |
| Environment                 | Interior                          |
| General application         | Hospitality, Logistics & Industry |
| Certifications              | 00                                |
| ETIM Class                  | EC000109                          |
| Fixture luminous flux (lm)  | 4141                              |
| Luminaire efficacy (lm/W)   | 77                                |
| LOR (%)                     | 80                                |
| Colour temperature (K)      | 4000                              |
| Light colour                | Neutral White                     |
| Total power consumption (W) | 54                                |
| Electrical protection       | Class I                           |
| Control gear type           | Electronic                        |
| Housing colour              | RAL9016                           |
| IP rating                   | IP66                              |
| IK rating                   | IK08                              |
| Product EAN number          | 5410288423449                     |
| Included lamp               | 0002767                           |

### DATA TABLE

#### General data

|                                  |                                   |
|----------------------------------|-----------------------------------|
| IPC Code                         | 0042344                           |
| Product name                     | Start Tubular IP66 228 EB 840     |
| Technology                       | Fluorescent                       |
| Housing                          | Polycarbonate                     |
| Environment                      | Interior                          |
| General application              | Hospitality, Logistics & Industry |
| Operating temperature range (°C) | 0 to +25                          |
| Certifications                   | 00                                |
| ETIM Class                       | EC000109                          |

## Start Tubular - Electronic

*Start Tubular IP66 228 EB 840*  
0042344

### Optical data

|                            |               |
|----------------------------|---------------|
| Fixture luminous flux (lm) | 4141          |
| Luminaire efficacy (lm/W)  | 77            |
| LOR (%)                    | 80            |
| Colour temperature (K)     | 4000          |
| Light colour               | Neutral White |
| Adjustable chromaticity    | N             |
| Distribution type          | Direct        |

### Electrical data

|                             |            |
|-----------------------------|------------|
| Total power consumption (W) | 54         |
| Mains voltage (V)           | 220-240V~  |
| Electrical protection       | Class I    |
| Control gear type           | Electronic |
| Transformer required        | Yes        |
| Glow Wire Test (°C)         | 850        |
| Lamp Energy Label (class)   | A+         |
| Nominal Frequency (Hz)      | 50/60Hz    |

### Physical data

|                             |               |
|-----------------------------|---------------|
| Housing colour              | RAL9016       |
| IP rating                   | IP66          |
| IK rating                   | IK08          |
| Diffuser finish             | Clear         |
| Diffuser material           | Polycarbonate |
| Reflector finish            | White         |
| Nominal Product Length (mm) | 1278          |
| Nominal Product Width (mm)  | 118           |
| Nominal Product Height (mm) | 119           |
| Weight (kg)                 | 2.4           |

### Packaging

|                                       |                |
|---------------------------------------|----------------|
| Single packaging type                 | Carton         |
| Product EAN number                    | 5410288423449  |
| Packaging single length / height (cm) | 130.0          |
| Packaging single width (cm)           | 13.0           |
| Packaging single depth (cm)           | 13.0           |
| DUN14 (outer)                         | 05410288423449 |
| Units per outer package               | 1              |
| Packaging outer length / height (cm)  | 130.0          |
| Packaging outer width (cm)            | 13.0           |
| Packaging outer depth (cm)            | 13.0           |


## PHOTOMETRY

## Start Tubular - Electronic

Start Tubular IP66 228 EB 840  
0042344

**SYLVANIA** 0042344

 This luminaire is compatible with bulbs of the energy classes:

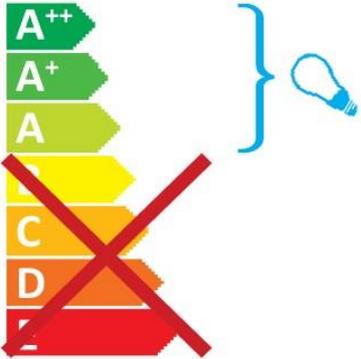


This luminaire is sold with a bulb of the energy class:

874/2012 

 This luminaire is compatible with bulbs of the energy classes:

This luminaire is sold with a bulb of the energy class:

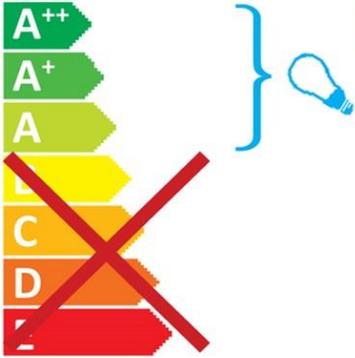

**SYLVANIA** 0042344  874/2012