Start Tubular - Electronic

Start Tubular IP66 235 EB 830

0042369



PRODUCT OVERVIEW

IPC Code	0042369
Product name	Start Tubular IP66 235 EB 830
Technology	Fluorescent
Housing	Polycarbonate
Environment	Interior
General application	Hospitality,Logistics & Industry
Certifications	00
ETIM Class	EC000109
Fixture luminous flux (lm)	5280
Luminaire efficacy (lm/W)	77
LOR (%)	80
Colour temperature (K)	3000
Light colour	Warm White
Total power consumption (W)	69
Electrical protection	Class I
Control gear type	Electronic
Housing colour	RAL9016
IP rating	IP66
IK rating	IK08
Product EAN number	5410288423692
Included lamp	0002769

DATA TABLE

General data

IPC Code	0042369
Product name	Start Tubular IP66 235 EB 830
Technology	Fluorescent
Housing	Polycarbonate
Environment	Interior
General application	Hospitality,Logistics & Industry
Operating temperature range (°C)	0 to +25
Certifications	00
ETIM Class	EC000109

© Feilo Sylvania | Date Printed: 28 Dec 2018

Start Tubular - Electronic

Start Tubular IP66 235 EB 830

0042369

Optical data

Fixture luminous flux (lm)	5280
Luminaire efficacy (lm/W)	77
LOR (%)	80
Colour temperature (K)	3000
Light colour	Warm White
Adjustable chromaticity	N
Distribution type	Direct

Electrical data

Total power consumption (W)	69
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic
Transformer required	Yes
Glow Wire Test (°C)	850
Lamp Energy Label (class)	A+
Nominal Frequency (Hz)	50/60Hz

Physical data

Housing colour	RAL9016
IP rating	IP66
IK rating	IK08
Diffuser finish	Clear
Diffuser material	Polycarbonate
Reflector finish	White
Nominal Product Length (mm)	1578
Nominal Product Width (mm)	118
Nominal Product Height (mm)	119
Weight (kg)	2.9

Packaging

Single packaging type	Carton
Product EAN number	5410288423692
Packaging single length / height (cm)	160.0
Packaging single width (cm)	13.0
Packaging single depth (cm)	13.0
DUN14 (outer)	05410288423692
Units per outer package	1
Packaging outer length / height (cm)	160.0
Packaging outer width (cm)	13.0
Packaging outer depth (cm)	13.0

PHOTOMETRY


© Feilo Sylvania | Date Printed: 28 Dec 2018

Start Tubular - Electronic


Start Tubular IP66 235 EB 830

0042369

TECHNICAL DRAWINGS





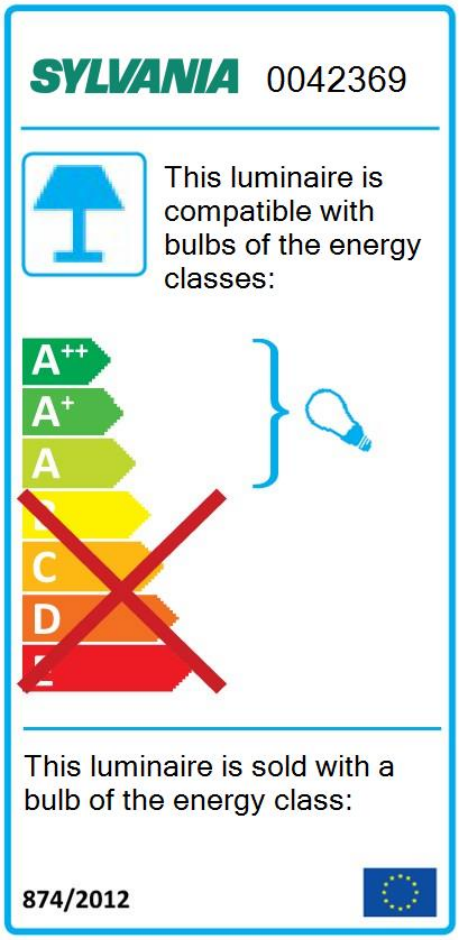


© Feilo Sylvania | Date Printed: 28 Dec 2018

Start Tubular - Electronic

Start Tubular IP66 235 EB 830

0042369

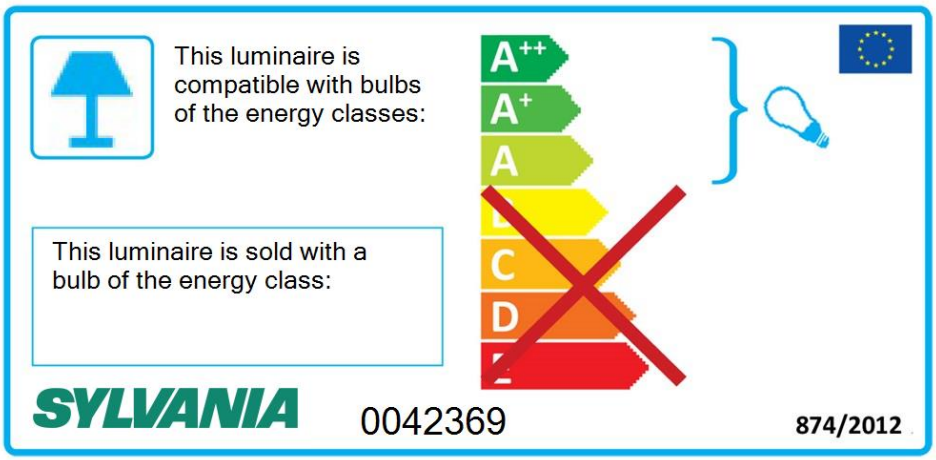

© Feilo Sylvania | Date Printed: 28 Dec 2018