Start Spot IP20

START SPOT LED DIM IP20 6500K

0053585



Product features

- Integrated dimmable LED IP20 adjustable downlight, RAL9016, 420LM, 5.5W, 6500K, 30 degree tilt, 38 degree beam angle, polycarbonate white body, low profile 41mm recessed depth, 86mm bezel diameter, 65-74mm cutout, clear lens

PRODUCT OVERVIEW

IPC Code	0053585
Product name	START SPOT LED DIM IP20 6500K
Technology	LED
Housing	Polycarbonate
Mount	Ceiling recessed
General application	Residential & Consumer
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (lm)	420
Luminaire efficacy (lm/W)	76
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	38
Glare control	6.1
Photobiological Risk Group	RG0
Total power consumption (W)	5.5
Electrical protection	Class II
Control gear type	Integral
Dimmable	Yes
LED Flickering Rate	Medium (21% - 40%)
Average life (Nominal) (h)	30000
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288535852
Lamps	No

DATA TABLE

General data

© Feilo Sylvania | Date Printed: 31 Dec 2018

Start Spot IP20

START SPOT LED DIM IP20 6500K

0053585

IPC Code	0053585
Product name	START SPOT LED DIM IP20 6500K
Technology	LED
Housing	Polycarbonate
Mount	Ceiling recessed
General application	Residential & Consumer
Operating temperature range (°C)	-10 to +40°C
Certifications	EUNEW008
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	420
Luminaire efficacy (lm/W)	76
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	38
Distribution type	Direct
Glare control	6.1
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	5.5
Mains voltage (V)	220-240V~
Lamp power factor	0.8
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	45
Electrical protection	Class II
Control gear type	Integral
Dimmable	Yes
Drive current (mA)	100
Inrush Current (A)	6
Inrush Duration (µs)	230
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Medium (21% - 40%)
Max. Luminaires per 10A C Breaker	10
Max. Luminaires per 13A C Breaker	13
Max. Luminaires per 16A C Breaker	15
Max. Luminaires per 20A C Breaker	15

Lifetime data

Lumen maintenance - L70 B50	25000
Average life (Nominal) (h)	30000

Physical data

Vertical Tilt (°)	30
Housing colour	White

© Feilo Sylvania | Date Printed: 31 Dec 2018

Start Spot IP20

START SPOT LED DIM IP20 6500K


0053585


IP rating	IP20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	Acrylic
Nominal Product Length (mm)	86
Nominal Product Width (mm)	86
Nominal Product Height (mm)	41
Nominal Product Diameter (mm)	86
Weight (kg)	0.084
Recessed Depth (mm)	40

Packaging

Single packaging type	Carton
Product EAN number	5410288535852
Packaging single length / height (cm)	9.0
Packaging single width (cm)	7.5
Packaging single depth (cm)	9.0
DUN14 (inner)	25410288535856
Units per inner package	6
Packaging inner length / height (cm)	28.5
Packaging inner width (cm)	9.0
Packaging inner depth (cm)	19.0
DUN14 (outer)	15410288535859
Units per outer package	48
Packaging outer length / height (cm)	38.0
Packaging outer width (cm)	30.0
Packaging outer depth (cm)	40.5

PHOTOMETRY

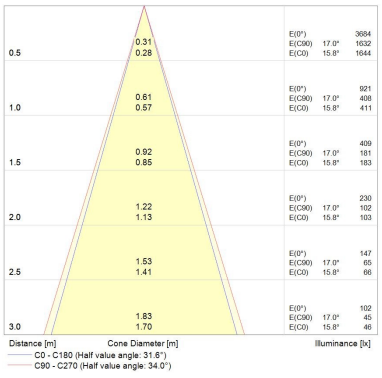

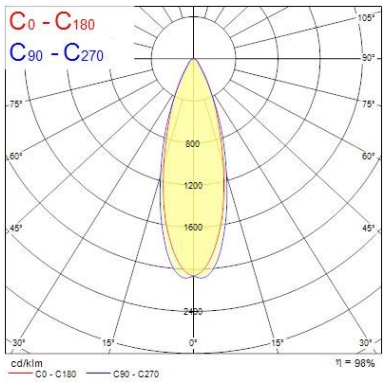


TECHNICAL DRAWINGS


© Feilo Sylvania | Date Printed: 31 Dec 2018

Start Spot IP20

START SPOT LED DIM IP20 6500K

0053585



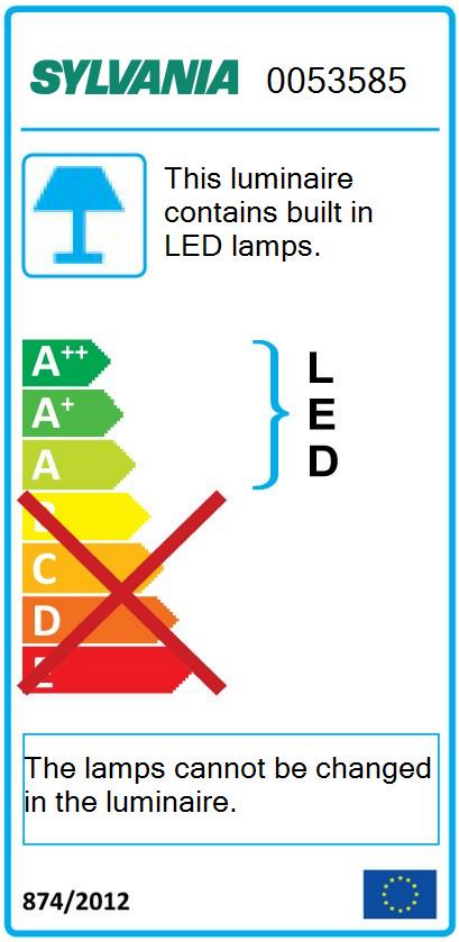


© Feilo Sylvania | Date Printed: 31 Dec 2018

Start Spot IP20

START SPOT LED DIM IP20 6500K

0053585

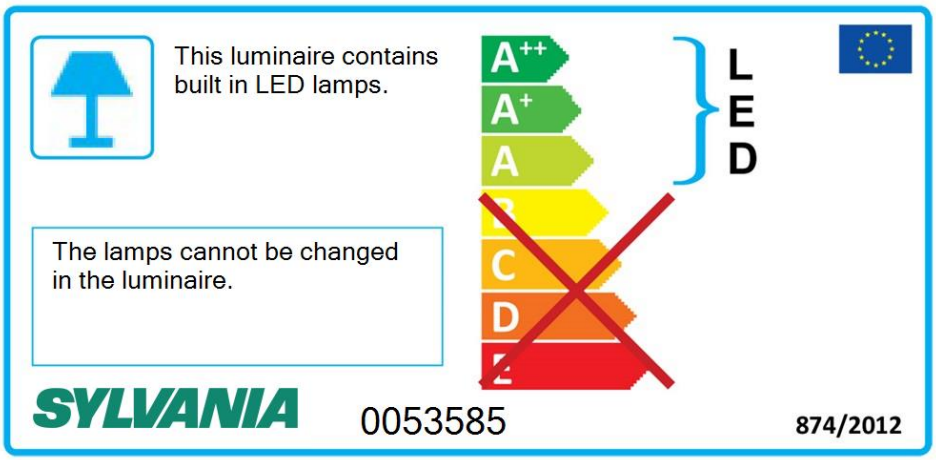

© Feilo Sylvania | Date Printed: 31 Dec 2018