Start Waterproof LED

START WATERPROOF LED 1565MM TWIN 6500K

0047879



Product features

- Weather resistant LED Luminaire, 1565MM with Twin Lamp, 80W at 6500K, 106lm/W. UV stablised polycarbonate cover with specially designed opal lens - softens and control the light whilst optimising output. No yellow staining. Highly efficient electronic driver included as standard. Smooth body finish, easy to handle. Minimal maintainence with no replacement of lamps . Through wiring achievable. IP65 rating and IK08 body durable for harsh locations. Professionally finished with Stainless Steel brackets. Suspension compatible.

PRODUCT OVERVIEW

IPC Code	0047879
Product name	START WATERPROOF LED 1565MM TWIN 6500K
Technology	LED
Housing	Polycarbonate
Mount	Surface or Suspended (with accessory 0045600)
Fixture rating	Enclosed
Environment	Internal/External with protection
General application	Logistics & Industry
Certifications	EUNEW009
Fixture luminous flux (lm)	8500
Luminaire efficacy (lm/W)	106
LOR (%)	100
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	120
Glare control	25.2
Photobiological Risk Group	RG0
Total power consumption (W)	80
Electrical protection	Class I
Control gear type	Electronic (constant current)
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Average life (Nominal) (h)	50000
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288478791
Lamps	Yes
Included lamp	INTEGRATED LED

© Feilo Sylvania | Date Printed: 31 Dec 2018

Start Waterproof LED

START WATERPROOF LED 1565MM TWIN 6500K

0047879

DATA TABLE

General data

IPC Code	0047879
Product name	START WATERPROOF LED 1565MM TWIN 6500K
Technology	LED
Housing	Polycarbonate
Mount	Surface or Suspended (with accessory 0045600)
Fixture rating	Enclosed
Environment	Internal/External with protection
General application	Logistics & Industry
Operating temperature range (°C)	-30 to +40
Certifications	EUNEW009

Optical data

Fixture luminous flux (lm)	8500
Luminaire efficacy (lm/W)	106
LOR (%)	100
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Adjustable chromaticity	N
Beam Angle (°)	120
Distribution type	Direct
Glare control	25.2
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	80
Mains voltage (V)	220-240V~
Lamp power factor	0.9
Electrical protection	Class I
Control gear type	Electronic (constant current)
Dimmable	No
Drive current (mA)	2000
Inrush Current (A)	9
Inrush Duration (µs)	109
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	11
Max. Luminaires per 16A C Breaker	29
Max. Luminaires per 20A C Breaker	35
Max. Luminaires per 16A B Breaker	25
Max. Luminaires per 20A B Breaker	32

Lifetime data

Average life (Nominal) (h)	50000

© Feilo Sylvania | Date Printed: 31 Dec 2018

Start Waterproof LED

START WATERPROOF LED 1565MM TWIN 6500K

0047879


Physical data


Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Clear
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1565
Nominal Product Width (mm)	123
Nominal Product Height (mm)	91
Weight (kg)	2.494

Packaging


Single packaging type	Mix blister(20% carton, 80% pl
Product EAN number	5410288478791
Packaging single length / height (cm)	156.6
Packaging single width (cm)	12.5
Packaging single depth (cm)	9.4
DUN14 (outer)	05410288478791
Units per outer package	1
Packaging outer length / height (cm)	156.6
Packaging outer width (cm)	12.5
Packaging outer depth (cm)	9.4

PHOTOMETRY

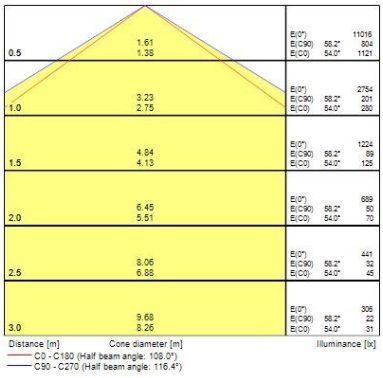

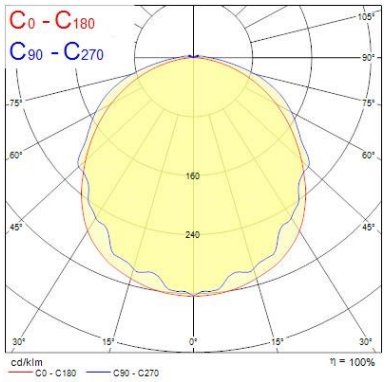

TECHNICAL DRAWINGS





© Feilo Sylvania | Date Printed: 31 Dec 2018

Start Waterproof LED

START WATERPROOF LED 1565MM TWIN 6500K

0047879

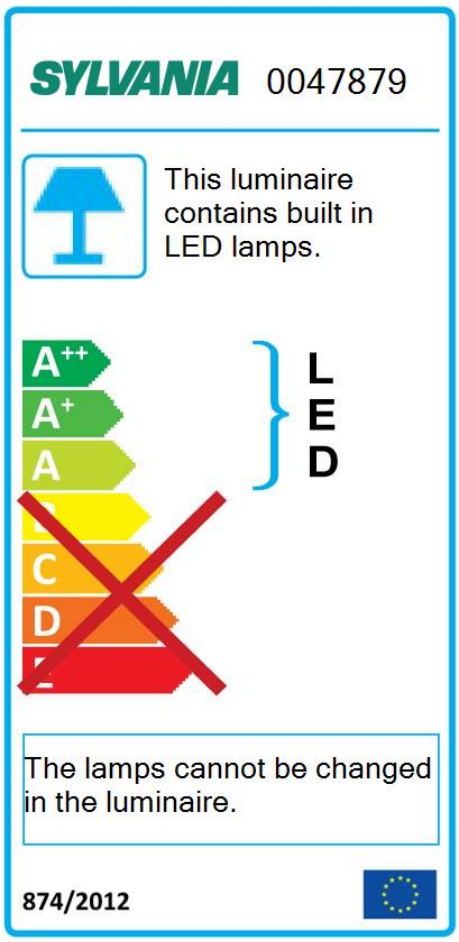

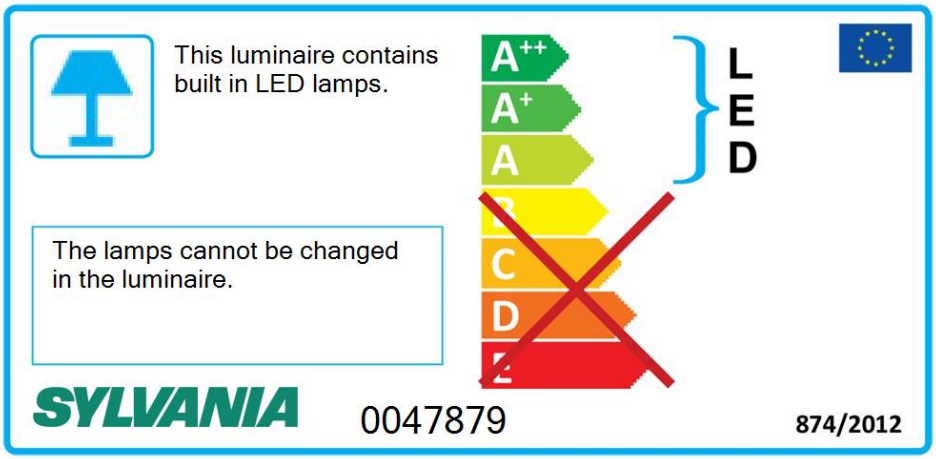

© Feilo Sylvania | Date Printed: 31 Dec 2018