# IP20 LED Batten

*LED IP20 BATTEN L1200 TWIN 4000K*

**0045163**



**Product features**

- full range of LED Battens to replace traditional T8 battens (600mm, 1200mm, 1500mm and 1800mm), ease of installation, 4000K, 25000h lifethtime

## PRODUCT OVERVIEW

| | |
|---|---|
| **IPC Code** | 0045163 |
| **Product name** | LED IP20 BATTEN L1200 TWIN 4000K |
| **Technology** | LED |
| **General application** | Residential & Consumer, |
| **Certifications** | EUNEW009 |
| **ETIM Class** | EC000109 |
| **Fixture luminous flux (lm)** | 3300 |
| **Luminaire efficacy (lm/W)** | 110 |
| **Colour temperature (K)** | 4000 |
| **Light colour** | Neutral White |
| **CRI (Ra)** | 80 |
| **Photobiological Risk Group** | 0 |
| **Total power consumption (W)** | 30 |
| **Electrical protection** | Class I |
| **IP rating** | IP20 |
| **IK rating** | IK02 |
| **Product EAN number** | 5410288451633 |
| **Lamps** | No |
| **Included lamp** | INTEGRATED LED |

## DATA TABLE

### General data

| | |
|---|---|
| **IPC Code** | 0045163 |
| **Product name** | LED IP20 BATTEN L1200 TWIN 4000K |
| **Technology** | LED |
| **General application** | Residential & Consumer, |
| **Certifications** | EUNEW009 |
| **ETIM Class** | EC000109 |

### Optical data

| | |
|---|---|
| **Fixture luminous flux (lm)** | 3300 |
| **Luminaire efficacy (lm/W)** | 110 |
| **Colour temperature (K)** | 4000 |



© Feilo Sylvania | Date Printed: 03 Jan 2019

# IP20 LED Batten

*LED IP20 BATTEN L1200 TWIN 4000K*

**0045163**

| | |
|---|---|
| **Light colour** | Neutral White |
| **CRI (Ra)** | 80 |
| **Photobiological Risk Group** | 0 |

## Electrical data

| | |
|---|---|
| **Total power consumption (W)** | 30 |
| **Mains voltage (V)** | 220-240V~ |
| **Electrical protection** | Class I |
| **Drive current (mA)** | 240 |
| **Nominal Frequency (Hz)** | 50/60Hz |

## Lifetime data

| | |
|---|---|
| **Lumen maintenance - L70 B50** | 25000 |


## Physical data


| | |
|---|---|
| **IP rating** | IP20 |
| **IK rating** | IK02 |
| **Nominal Product Length (mm)** | 1200 |
| **Nominal Product Width (mm)** | 82 |
| **Nominal Product Height (mm)** | 48 |
| **Weight (kg)** | 0.63 |

## Packaging

| | |
|---|---|
| **Single packaging type** | Mix blister(20% carton, 80% pl |
| **Product EAN number** | 5410288451633 |
| **Packaging single length / height (cm)** | 121.0 |
| **Packaging single width (cm)** | 8.6 |
| **Packaging single depth (cm)** | 5.2 |
| **DUN14 (outer)** | 15410288451630 |
| **Units per outer package** | 12 |
| **Packaging outer length / height (cm)** | 122.0 |
| **Packaging outer width (cm)** | 45.5 |
| **Packaging outer depth (cm)** | 23.5 |

## PHOTOMETRY

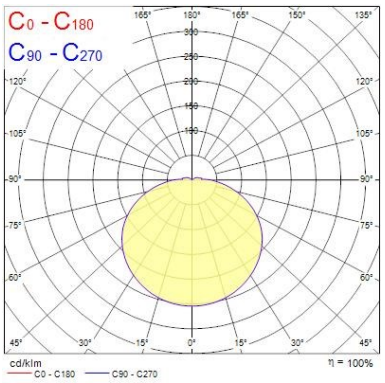

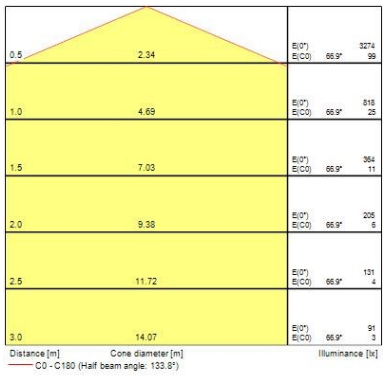


© Feilo Sylvania | Date Printed: 03 Jan 2019


# IP20 LED Batten

*LED IP20 BATTEN L1200 TWIN 4000K*

**0045163**

## TECHNICAL DRAWINGS



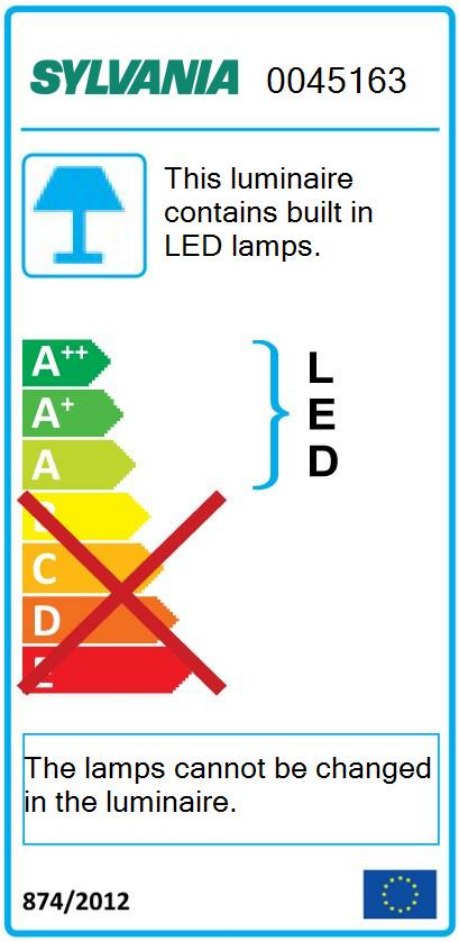



© Feilo Sylvania | Date Printed: 03 Jan 2019

# IP20 LED Batten

*LED IP20 BATTEN L1200 TWIN 4000K*

**0045163**

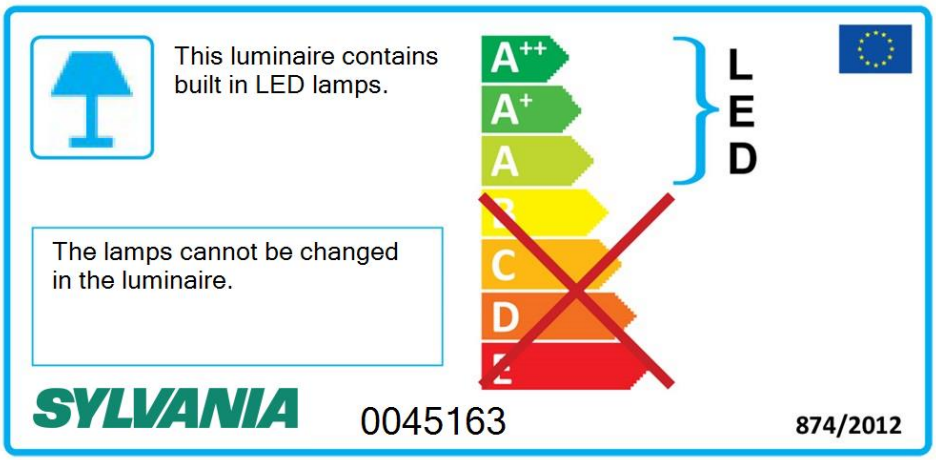




© Feilo Sylvania | Date Printed: 03 Jan 2019