

Skyline LED Mini

SKYLINE LED MINI 6000LM ASYMMETRIC WHITE

0043566



Product features

- Exterior LED Pole top luminaire, comes complete with a 6m cable, light weight and compact, Aluminium housing, White - RAL9003, Asymmetrical distribution, IP65, IK08, CLASS I, 4000K, non dimming, 6208 lm, 47W, 132lm/W, driver current 500mA, CRI70, 76,000hrs L70B50 lifetime, Ø484x352mm - 6.65kg, 5 step MacAdam ellipse, suitable for 76mm pole tops



PRODUCT OVERVIEW

IPC Code	0043566
Product name	SKYLINE LED MINI 6000LM ASYMMETRIC WHITE
Technology	LED
Housing	Aluminium
Mount	Pole Mounted
General application	Office,Hospitality,Retail,Logistics & Industry,Education,
Certifications	EUNEW029
ETIM Class	EC000062
E-number FI	4579263
Fixture luminous flux (lm)	6208
Luminaire efficacy (lm/W)	132
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	70
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG1
Total power consumption (W)	47
Electrical protection	Class I
Control gear type	Electronic
Dimmable	No
Housing colour	White - RAL9003
IP rating	IP65
IK rating	IK08
Product EAN number	5410288435664
Lamps	No
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	0043566
Product name	SKYLINE LED MINI 6000LM ASYMMETRIC WHITE

Skyline LED Mini

SKYLINE LED MINI 6000LM ASYMMETRIC WHITE

0043566

Technology	LED
Housing	Aluminium
Mount	Pole Mounted
General application	Office,Hospitality,Retail,Logistics & Industry,Education,
Operating temperature range (°C)	-30 to +40
Certifications	EUNEW029
ETIM Class	EC000062
E-number FI	4579263

Optical data

Fixture luminous flux (lm)	6208
Luminaire efficacy (lm/W)	132
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	70
Colour Variation Initial (SDCM)	5
Distribution type	Asymmetrical
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	47
Mains voltage (V)	230-240V~
Lamp power factor	0.98
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic
Dimmable	No
Drive current (mA)	500
Inrush Current (A)	32
Inrush Duration (µs)	267
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	11
Max. Luminaires per 13A C Breaker	16
Max. Luminaires per 16A C Breaker	20
Max. Luminaires per 20A C Breaker	25
Max. Luminaires per 10A B Breaker	7
Max. Luminaires per 13A B Breaker	10
Max. Luminaires per 16A B Breaker	12
Max. Luminaires per 20A B Breaker	15

Lifetime data

Lumen maintenance - L70 B50	76000
Lumen maintenance - L80 B50	76000
Lumen maintenance - L90 B50	76000

Physical data

Housing colour	White - RAL9003
----------------	-----------------

Skyline LED Mini

SKYLINE LED MINI 6000LM ASYMMETRIC WHITE

0043566

IP rating	IP65
IK rating	IK08
Nominal Product Width (mm)	484
Nominal Product Height (mm)	352
Weight (kg)	6.65


Packaging

Single packaging type	Carton
Product EAN number	5410288435664
Packaging single length / height (cm)	50.0
Packaging single width (cm)	50.0
Packaging single depth (cm)	38.0
DUN14 (outer)	05410288435664
Units per outer package	1
Packaging outer length / height (cm)	50.0
Packaging outer width (cm)	50.0
Packaging outer depth (cm)	38.0


Safety data

Dry applications use only	No
---------------------------	----

PHOTOMETRY

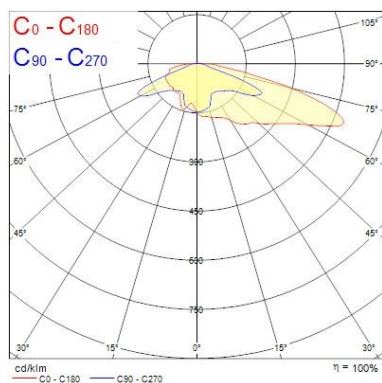

TECHNICAL DRAWINGS



Skyline LED Mini

SKYLINE LED MINI 6000LM ASYMMETRIC WHITE

0043566

