

PIXER Recessed 1250x310

PIXER RECESSED 1250X310 HO 4P 4000K DALI

2069420



Product features

- PIXER RECESSED 1250x310 HO 4P 4000K DALI is a high performance low glare office luminaire with individually adjustable light pods to enhance architectural design. Diffuser is made of optical grade polycarbonate with an optical film for high efficacy and excellent glare control. Suitable for offices where aesthetics is important. Ceiling recessed 1250x310mm, White colour - RAL9010. DALI dimmable, 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Lumen package of 4700 lm, total power consumption 36W, efficacy 131lm/W. Lumen maintenance of L90B10 at 61,000 hours. UGR<19. IK02, IP20. Electrical protection: Class II. Glow wire test 650°C.



PRODUCT OVERVIEW

IPC Code	2069420
Product name	PIXER RECESSED 1250X310 HO 4P 4000K DALI
Technology	LED (3 SDCM)
Housing	Powder coated steel
Mount	Recessed (surface mounting with accessory)
Fixture rating	Enclosed
General application	Office,Hospitality,Education,
Certifications	EUNEW008
ETIM Class	EC002892
Fixture luminous flux (lm)	4700
Luminaire efficacy (lm/W)	131
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	<19
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	DALI
Control gear mounting	Remote
Dimmable	Y
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768694204
Lamps	No
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2069420
Product name	PIXER RECESSED 1250X310 HO 4P 4000K DALI

Pixer Recessed 1250x310

PIXER RECESSED 1250X310 HO 4P 4000K DALI

2069420

Technology	LED (3 SDCM)
Housing	Powder coated steel
Mount	Recessed (surface mounting with accessory)
Fixture rating	Enclosed
General application	Office,Hospitality,Education,
Certifications	EUNEW008
ETIM Class	EC002892

Optical data

Fixture luminous flux (lm)	4700
Luminaire efficacy (lm/W)	131
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	<19
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	36
Mains voltage (V)	220-240V~
Lamp power factor	0.94
Electrical protection	Class II
Control gear required	No
Control gear type	DALI
Control gear mounting	Remote
Dimmable	Y
Drive current (mA)	1200
Inrush Current (A)	28
Inrush Duration (µs)	195
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	30
Max. Luminaires per 16A C Breaker	36
Max. Luminaires per 20A C Breaker	46
Max. Luminaires per 10A B Breaker	13
Max. Luminaires per 13A B Breaker	18
Max. Luminaires per 16A B Breaker	22
Max. Luminaires per 20A B Breaker	28

Lifetime data

Lumen maintenance - L70 B50	72000
Lumen maintenance - L70 B20	72000
Lumen maintenance - L80 B50	72000
Lumen maintenance - L80 B20	72000
Lumen maintenance - L80 B10	72000
Lumen maintenance - L90 B50	72000
Lumen maintenance - L90 B20	66000

Pixer Recessed 1250x310

PIXER RECESSED 1250X310 HO 4P 4000K DALI
2069420

Lumen maintenance - L90 B10 61000

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser finish	Clear
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1245
Nominal Product Width (mm)	307
Nominal Product Height (mm)	75
Weight (kg)	6.0
Recessed Depth (mm)	150


Packaging

Single packaging type	Carton
Product EAN number	5025768694204
Packaging single length / height (cm)	132.3
Packaging single width (cm)	33.9
Packaging single depth (cm)	11.6
DUN14 (outer)	05025768694204
Units per outer package	1
Packaging outer length / height (cm)	132.3
Packaging outer width (cm)	33.9
Packaging outer depth (cm)	11.6

Safety data

Dry applications use only	Yes
---------------------------	-----

PHOTOMETRY

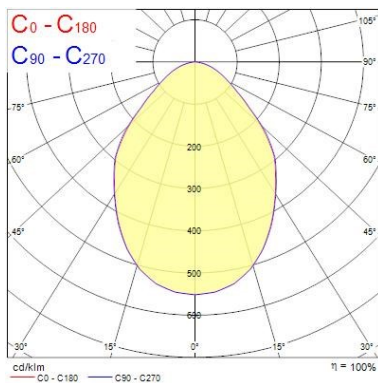

Distance (m)	Cone diameter (m)	E(0°)	E(C90)	E(C0)
0.5	0.89 0.88	10984	41.7° 2198	41.3° 2201
1.0	1.78 1.76	2691	41.7° 540	41.3° 580
1.5	2.67 2.64	1182	41.7° 240	41.3° 245
2.0	3.56 3.51	648	41.7° 138	41.3° 138
2.5	4.45 4.39	415	41.7° 88	41.3° 88
3.0	5.35 5.27	288	41.7° 61	41.3° 61

Distance (m) Cone diameter (m) Illuminance [lx]


— C0 - C180 (Half beam angle: 82.6°)
— C90 - C270 (Half beam angle: 83.4°)

TECHNICAL DRAWINGS


Pixer Recessed 1250x310


PIXER RECESSED 1250X310 HO 4P 4000K DALI

2069420





Concord 2069420

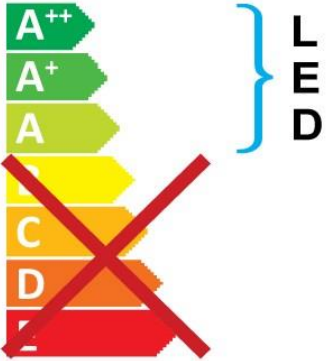
 This luminaire contains built in LED lamps.




The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

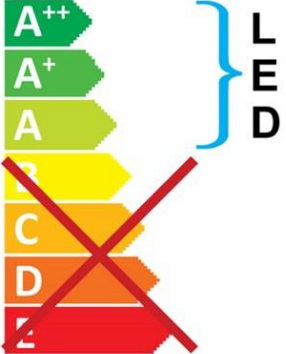

The lamps cannot be changed in the luminaire.

Concord 2069420 

874/2012

Pixer Recessed 1250x310

PIXER RECESSED 1250X310 HO 4P 4000K DALI

2069420
