


## SylSafe Bay

SylSafe Bay HB C EMC NM MS  
0041734



### Product features

- SylSafe Bay HB C EMC NM MS is a dust and waterproof surface mounted emergency luminaire for industrial applications. Highbay optics for high ceiling applications. Non-maintained version for central battery systems. 177lm, 3W, IK03, IP65. Power Factor 0.44. Class II electrical construction.



## PRODUCT OVERVIEW

IPC Code	0041734
Product name	SylSafe Bay HB C EMC NM MS
Technology	LED
Type	LED
Mount	Surface mounted
General application	Office, Hospitality, Retail, Museums & Galleries, Education, Logistics & Industry,
Certifications	EUNEW002
ETIM Class	EC001957
Fixture luminous flux (lm)	177
Luminaire efficacy (lm/W)	59
Colour temperature (K)	5700
CRI (Ra)	75
Photobiological Risk Group	RG2
Luminous flux (emergency) (lm)	200
Total power consumption (W)	3
Electrical protection	Class II
Control gear type	Emergency (3 hour non-maintained)
Average life (Nominal) (h)	35040
Housing colour	White
IP rating	IP65
IK rating	IK03
Product EAN number	5410288417349
Lamps	No
Included lamp	INTEGRATED LED

## DATA TABLE

### General data

IPC Code	0041734
Product name	SylSafe Bay HB C EMC NM MS
Technology	LED
Type	LED
Mount	Surface mounted

## SylSafe Bay

*SylSafe Bay HB C EMC NM MS*  
0041734

General application	Office,Hospitality,Retail,Museums & Galleries,Education,Logistics & Industry,
Certifications	EUNEW002
ETIM Class	EC001957

### Optical data

Fixture luminous flux (lm)	177
Luminaire efficacy (lm/W)	59
Colour temperature (K)	5700
CRI (Ra)	75
Distribution type	High-Bay
Photobiological Risk Group	RG2
Luminous flux (emergency) (lm)	200
Emergency duration (h)	3

### Electrical data

Total power consumption (W)	3
Mains voltage (V)	230-240V~
Lamp power factor	0.44
Electrical protection	Class II
Control gear required	Yes
Control gear type	Emergency (3 hour non-maintained)
Drive current (mA)	46
kWh per 1000 hours burning time	3
Nominal Frequency (Hz)	50/60Hz

### Lifetime data

Average life (Nominal) (h)	35040
----------------------------	-------

### Physical data

Housing colour	White
IP rating	IP65
IK rating	IK03
Nominal Product Length (mm)	197
Nominal Product Width (mm)	197
Nominal Product Height (mm)	53



### Packaging

Single packaging type	Plastic
Product EAN number	5410288417349
DUN14 (outer)	05410288417349
Units per outer package	5
Packaging outer length / height (cm)	42.2
Packaging outer width (cm)	25.2
Packaging outer depth (cm)	13.2


## PHOTOMETRY

## SylSafe Bay

SylSafe Bay HB C EMC NM MS  
0041734

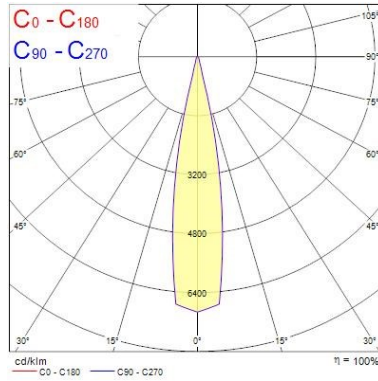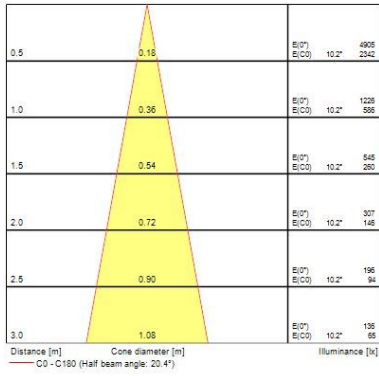



## TECHNICAL DRAWINGS




## SylSafe Bay SylSafe Bay HB C EMC NM MS 0041734


**SYLVANIA** 0041734



 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED** 

The lamps cannot be changed in the luminaire.

**SYLVANIA** 0041734 874/2012