

SylSafe Twin

SylSafe Twin TS C EM3 NM DA

0041770



Product features

- SylSafe Twin TS C EM3 NM DA is a dust and waterproof wall mounted twin LED projector for industrial applications. Two individually adjustable heads each delivering 200Lm. White housing colour. Non-maintained 3hr emergency operation with NiCd rechargeable battery. Recharge period 24 hours. Self testing with DALI monitoring capability. 400Lm, 3.23W, IK03, IP65, Power Factor 0.6. Class I electrical construction.



PRODUCT OVERVIEW

IPC Code	0041770
Product name	SylSafe Twin TS C EM3 NM DA
Technology	LED
Type	LED
Mount	Surface mounted
General application	Logistics & Industry
Certifications	EUNEW002
ETIM Class	EC001957
Fixture luminous flux (lm)	400
Luminaire efficacy (lm/W)	124
Colour temperature (K)	5700
CRI (Ra)	70
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	334
Total power consumption (W)	3.23
Electrical protection	Class I
Control gear type	Emergency (3 hour non-maintained)
Average life (Nominal) (h)	35040
Housing colour	White
IP rating	IP65
IK rating	IK03
Product EAN number	5410288417707
Lamps	No
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	0041770
Product name	SylSafe Twin TS C EM3 NM DA
Technology	LED
Type	LED
Mount	Surface mounted
General application	Logistics & Industry

SylSafe Twin

SylSafe Twin TS C EM3 NM DA

0041770

Certifications	EUNEW002
ETIM Class	EC001957

Optical data

Fixture luminous flux (lm)	400
Luminaire efficacy (lm/W)	124
Colour temperature (K)	5700
CRI (Ra)	70
Distribution type	Standard
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	334
Emergency duration (h)	3

Electrical data

Total power consumption (W)	3.23
Mains voltage (V)	230-240V~
Lamp power factor	0.6
Electrical protection	Class I
Control gear required	Yes
Control gear type	Emergency (3 hour non-maintained)
Drive current (mA)	25
kWh per 1000 hours burning time	3
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Average life (Nominal) (h)	35040
----------------------------	-------

Physical data

Housing colour	White
IP rating	IP65
IK rating	IK03
Nominal Product Length (mm)	280
Nominal Product Width (mm)	87
Nominal Product Height (mm)	300
Weight (kg)	1.7

Packaging



Single packaging type	Carton
Product EAN number	5410288417707
Packaging single length / height (cm)	30.3
Packaging single width (cm)	28.2
Packaging single depth (cm)	9.2
DUN14 (inner)	05410288417707
Units per outer package	5
Packaging outer length / height (cm)	49.5
Packaging outer width (cm)	30.0
Packaging outer depth (cm)	32.5

SylSafe Twin


SylSafe Twin TS C EM3 NM DA

0041770

PHOTOMETRY

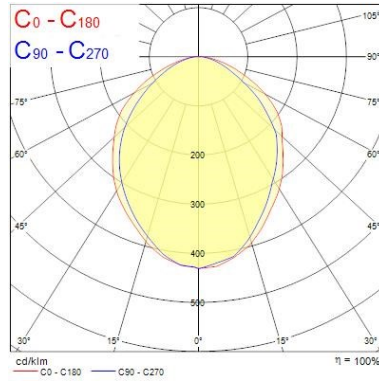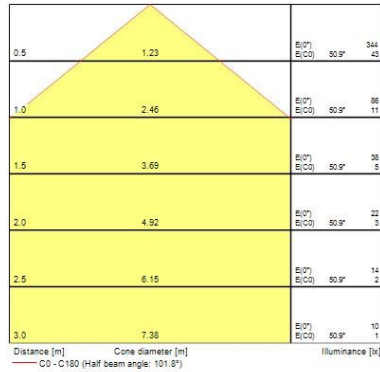

TECHNICAL DRAWINGS



SylSafe Twin


SylSafe Twin TS C EM3 NM DA

0041770

SYLVANIA 0041770



This luminaire contains built in LED lamps.

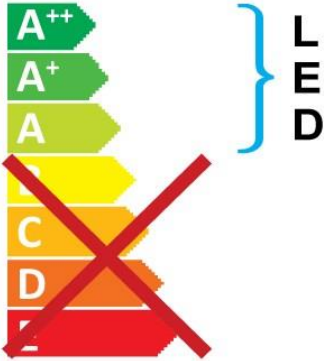


The lamps cannot be changed in the luminaire.

874/2012 



This luminaire contains built in LED lamps.

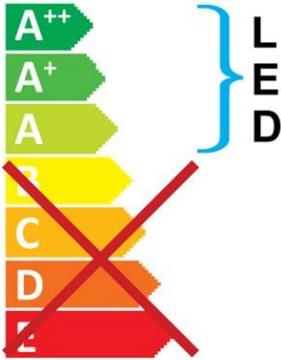

The lamps cannot be changed in the luminaire.

SYLVANIA 0041770  874/2012