


SylSafe Spot

SylSafe Spot HR R EM3 NM MS
0041726



Product features

- SylSafe Spot HR R EM3 NM MS is a miniature emergency recessed downlight with high lumen output for high risk area illumination. Non-maintained 3 hr emergency duration with NiMH rechargeable battery. Recharge period 24 hours. Quick and easy installation with driver module and battery pack contained in articulated case that can pass through 40mm cutout. 300lm, 4W, IK03, IP30. Power Factor 0.66. Class II electrical construction.



PRODUCT OVERVIEW

IPC Code	0041726
Product name	SylSafe Spot HR R EM3 NM MS
Technology	LED
Type	LED
Mount	Recessed
General application	Office,Hospitality,Retail,Museums & Galleries,Education
Certifications	EUNEW001
ETIM Class	EC001957
Fixture luminous flux (lm)	300
Luminaire efficacy (lm/W)	75
Colour temperature (K)	6300
CRI (Ra)	68
Photobiological Risk Group	RG02
Luminous flux (emergency) (lm)	300
Total power consumption (W)	4
Electrical protection	Class II
Control gear type	Emergency (3 hour non-maintained)
Average life (Nominal) (h)	35040
Housing colour	White
IP rating	IP30
IK rating	IK03
Product EAN number	5410288417264
Lamps	No
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	0041726
Product name	SylSafe Spot HR R EM3 NM MS
Technology	LED
Type	LED
Mount	Recessed
General application	Office,Hospitality,Retail,Museums & Galleries,Education

SylSafe Spot

SylSafe Spot HR R EM3 NM MS
0041726

Certifications	EUNEW001
ETIM Class	EC001957

Optical data

Fixture luminous flux (lm)	300
Luminaire efficacy (lm/W)	75
Colour temperature (K)	6300
CRI (Ra)	68
Distribution type	High Risk Area
Photobiological Risk Group	RG02
Luminous flux (emergency) (lm)	300
Emergency duration (h)	3

Electrical data

Total power consumption (W)	4
Mains voltage (V)	230-240V~
Lamp power factor	0.66
Electrical protection	Class II
Control gear required	Yes
Control gear type	Emergency (3 hour non-maintained)
Drive current (mA)	53
kWh per 1000 hours burning time	4
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Average life (Nominal) (h)	35040
-----------------------------------	-------

Physical data

Housing colour	White
IP rating	IP30
IK rating	IK03
Nominal Product Length (mm)	50
Nominal Product Width (mm)	50
Nominal Product Height (mm)	45
Weight (kg)	0.485



Packaging

Single packaging type	Carton
Product EAN number	5410288417264
Packaging single length / height (cm)	24.1
Packaging single width (cm)	11.5
Packaging single depth (cm)	5.5
DUN14 (inner)	05410288417264
DUN14 (outer)	05410288417264
Units per outer package	17
Packaging outer length / height (cm)	42.4
Packaging outer width (cm)	29.8
Packaging outer depth (cm)	28.0


SylSafe Spot

SylSafe Spot HR R EM3 NM MS
0041726

PHOTOMETRY

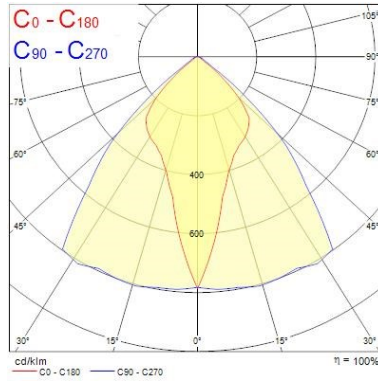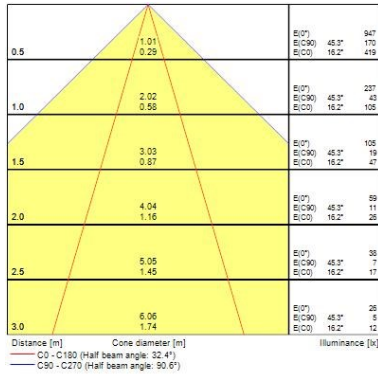

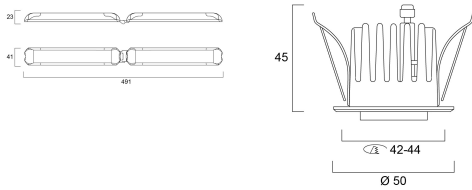

TECHNICAL DRAWINGS




SylSafe Spot *SylSafe Spot HR R EM3 NM MS* 0041726


SYLVANIA 0041726


 This luminaire contains built in LED lamps.

 } **LED**


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

SYLVANIA 0041726  874/2012