

Ascent 150 II Round White Reflector

ASCENT 150 II 2100 3K DALI WHT
2059446



Product features

- The ASCENT 150 II 2100 3K DALI WHT is a high efficient downlight luminaire with luminous flux: 2082, luminaire efficacy: 109.578947368421, Colour rendering index Ra >80, Colour temperature: 3000K Warm white, Average life rated at 50,000Hrs, Class II, Protection rating IP44/IK02, Cut out dimensions: 176mm, Weight: 1.7kg



PRODUCT OVERVIEW

IPC Code	2059446
Product name	ASCENT 150 II 2100 3K DALI WHT
Technology	LED
Housing	Aluminium
Mount	Recessed
Environment	Internal
General application	Hospitality,Office,Retail
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (lm)	2082
Luminaire efficacy (lm/W)	110
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Photobiological Risk Group	Exempt Group 0
Total power consumption (W)	19
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	99
Average life (Nominal) (h)	50000
IP rating	IP44
IK rating	IK02
Product EAN number	5025768594467
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2059446
Product name	ASCENT 150 II 2100 3K DALI WHT
Technology	LED
Housing	Aluminium
Mount	Recessed
Environment	Internal

Ascent 150 II Round White Reflector

ASCENT 150 II 2100 3K DALI WHT

2059446

General application	Hospitality,Office,Retail
Certifications	EUNEW008
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	2082
Luminaire efficacy (lm/W)	110
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam angle (Rated) (°)	80
Distribution type	Direct
Photobiological Risk Group	Exempt Group 0

Electrical data

Total power consumption (W)	19
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear type	Electronic
Transformer required	Yes
Minimum dimming level (%)	99
Inrush Current (A)	20.9
Inrush Duration (µs)	139
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60/HF
Max. Luminaires per 16A C Breaker	26

Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Lumen maintenance - L90 B20	60000
Lumen maintenance - L90 B10	52000
Average life (Nominal) (h)	50000

Physical data

IP rating	IP44
IK rating	IK02
Diffuser finish	Clear
Nominal Product Width (mm)	188
Nominal Product Height (mm)	158
Weight (kg)	1.7
Recessed Depth (mm)	142


Ascent 150 II Round White Reflector

ASCENT 150 II 2100 3K DALI WHT
2059446

Packaging

Single packaging type	Carton
Product EAN number	5025768594467
Packaging single length / height (cm)	25.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	25.0
DUN14 (outer)	05025768594467
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	20.0
Packaging outer depth (cm)	25.0

PHOTOMETRY

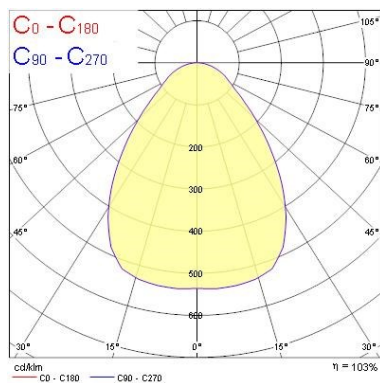

0.5	0.85	E0° E10° E20°	40.3°	1480 990
1.0	1.70	E0° E10° E20°	40.3°	1115 250
1.5	2.54	E0° E10° E20°	40.3°	496 111
2.0	3.39	E0° E10° E20°	40.3°	299 62
2.5	4.24	E0° E10° E20°	40.3°	178 40
3.0	5.09	E0° E10° E20°	40.3°	124 28

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 80.6°)

Ascent 150 II Round White Reflector

ASCENT 150 II 2100 3K DALI WHT
2059446

