

## Model I-IP-IO & I-IPW Series B



# Informer-IP, Two-Way IP-enabled Intercom and Alarm Initiation Point

Federal Signal's long-standing Informer is now IP-enabled. The Informer-IP Series B can be used as a warning device, a two-way intercom and an alarm initiation point that connects to the Commander® On-Premise System. The B model of the Informer-IP removes support of the key fob and adds the ability to store pre-recorded messages on a removable micro SD card.

The Informer-IP's internal speaker microphone provide clear two-way intercom voice communications. Incoming warnings and alerts can be live voice, pre-recorded messages or tone files. Two different predefined alert events can be triggered from the Informer-IP Series B. Alert messages initiated from the Informer-IP Series B can be sent to emergency personnel via e-mail, text messages, phone, handheld radios; and can also be used to activate other Informer units and sirens.

The Informer-IP Series B features an audio output for connecting public address systems, two relay outputs for controlling strobes or other devices, and an RS232 port for driving a scrolling message display in order for the same message

that is heard over the speaker to simultaneously be viewed on the display. The Informer-IP provides the same tone and voice alerts available with Federal Signal's UltraVoice<sup>™</sup> outdoor siren controllers for seamless indoor and outdoor mass notification.

The Informer-IP I-IP-IO model is designed for desktop use. Power options include an external AC transformer or PoE (Power over Ethernet). All wiring runs to accessible connectors on the back of the unit for quick and easy installation.

Also available is the Informer-IPW, which is designed to be wall mounted or recessed into the wall. All wiring is contained within an aluminum case and five pre-punched, easy-to-remove conduit holes are available to facilitate wiring connections into and out of the unit. The case has top mounting holes and is pre-wired for the LP1 strobe option.

Schools, hospitals, police and fire stations, government facilities and industrial plants will find that the Informer-IP provides an unmatched value for their indoor alerting and notification needs.


### FEATURES

- Two-way alerting and intercom capabilities
- Power over Ethernet (PoE) or AC powered
- Internal speaker rated at 80 dB @ 10-ft
- Receives live voice, text-to-speech and prerecorded voice or tone files
- Up to 4000 tone/voice messages via removable micro SD card

\*Support for the I-Keyfob has been discontinued.

- Can be used as activation device
- Desk or wall mount models
- Panic button alarm
- US ETL Listed to UL Std 60065
- Canadian ETL Listed to UL Std 60065 for I-IPWB only

## Informer-IP, Two-Way IP-enabled Intercom and Alarm Initiation Point

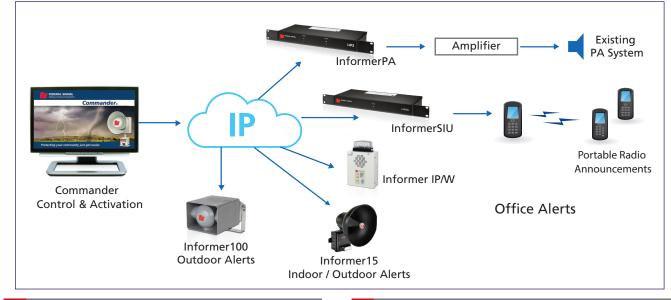

## S P E C I F I C A T I O N S

- Tone and voice compatible with Federal Signal UltraVoice controllers
- Up to 4000 tone and/or voice messages via removable micro SD card
- Wired Ethernet, can be powered via PoE
- Input: 115 to 230VAC, 50/60Hz, 350mA maximum (I-IPWB) nominal 120VAC 60Hz (I-IP-IO)
- 80 dB speaker with adjustable volume control
- Speaker provides audio and microphone for two-way communications
- RS232 port for driving an optional Scrolling Message Display
- Two programmable relay outputs for controlling strobe lights or other devices (pre-wired for LP1 Strobe, I-IPWB)
- 600 Ohm audio output ties into existing PA, or external speaker
- Works with redundant Commander networking for reliable fail safe operation
- Complies with FCC Title 47, Part 15 and UL 60065
- I-IPWB complies with CAN/CSA-C22.2 No. 60065
- Commander software provides control and status monitoring of the Informer-IP.



External push button activation

## HOW TO ORDER

Description	Part Number
Informer-IP Desk Mount	I-IP-IO
Informer-IP Wall Mount	I-IPW

Informer-IP requires Federal Signal Commander application software

There is a programming fee associated with Informer-IPs programmed at the factory. Contact your local representative for a quotation.

### OPTIONAL ACCESSORIES

Description	Part Number
Informer-IP Setup Wizard Software & Cable	I-IP-SW
Yellow Station with Momentary Contact – "EVACUATION"	PSEV-YM
Yellow Station with Momentary Contact and Sounder Cover – "EVACUATION"	PSEVSC-YM
Red Station with Momentary Contact – "EMERGENCY"	PSEM-RM
Red Station with Momentary Contact and Sounder Cover – "EMERGENCY"	PSEMSC-RM
12VDC Strobe (can be powered by internal power supply for I-IPWB)	LP1-012 <u>*</u>

\*(A) Amber, (B) Blue, (C) Clear, (G) Green or (R) Red (I-IPW only)



A flush mount kit is included for recessed applications as shown.

® Windows is a registered trademark of Microsoft Corporation in the United States and other countries.

Commander is a registered trademark of Federal Signal Corporation.