

Lumina

Lumina Sync LED 2700K

3039981



Product features

- Ambient decorative Sync LED rectangular vertical wall light with direct / indirect lighting to provide a soft lighting effect, 2700K amber white colour temperature, white aluminium body and integrated LED (non-dimmable) driver, 272 lumens, 6W, 45lm/W, 2700K, IP20, RAL 9003, 30.000hrs



PRODUCT OVERVIEW

IPC Code	3039981
Product name	Lumina Sync LED 2700K
Technology	LED
Housing	Aluminium
Mount	Wall Surface
Environment	Internal
General application	Hospitality, Residential & Consumer
Certifications	EUNEW009
ETIM Class	EC002892
E-number FI	4271111
E-number SE	7502648
Fixture luminous flux (lm)	272
Luminaire efficacy (lm/W)	45
LOR (%)	100
Colour temperature (K)	2700
Light colour	Amber White
CRI (Ra)	85
Total power consumption (W)	6
Electrical protection	Class II
Control gear type	Electronic
Average life (Nominal) (h)	30000
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	8711971399810
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	3039981
Product name	Lumina Sync LED 2700K
Technology	LED
Housing	Aluminium

Lumina

Lumina Sync LED 2700K

3039981

Mount	Wall Surface
Environment	Internal
General application	Hospitality, Residential & Consumer
Certifications	EUNEW009
ETIM Class	EC002892
E-number FI	4271111
E-number SE	7502648

Optical data

Fixture luminous flux (lm)	272
Luminaire efficacy (lm/W)	45
LOR (%)	100
Colour temperature (K)	2700
Light colour	Amber White
CRI (Ra)	85
Adjustable chromaticity	N
Distribution type	Direct / Indirect

Electrical data

Total power consumption (W)	6
Mains voltage (V)	100-240V~
Electrical protection	Class II
Control gear type	Electronic
Drive current (mA)	500

Lifetime data

Average life (Nominal) (h)	30000
----------------------------	-------

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	80
Nominal Product Width (mm)	122
Nominal Product Height (mm)	80
Weight (kg)	0.288

Packaging

Single packaging type	Carton
Product EAN number	8711971399810
Packaging single length / height (cm)	12.63
Packaging single width (cm)	8.63
Packaging single depth (cm)	9.07
DUN14 (outer)	18711971399817
Units per outer package	20
Packaging outer length / height (cm)	44.9
Packaging outer width (cm)	27.4
Packaging outer depth (cm)	20.5


Lumina Lumina Sync LED 2700K 3039981

PHOTOMETRY


0.5	3.15	E(0°) E(C0)	72.4°	240 3
1.0	6.30	E(0°) E(C0)	72.4°	60 1
1.5	9.46	E(0°) E(C0)	72.4°	27 0
2.0	12.61	E(0°) E(C0)	72.4°	15 0
2.5	15.76	E(0°) E(C0)	72.4°	10 0
3.0	18.91	E(0°) E(C0)	72.4°	7 0

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 144.8°)

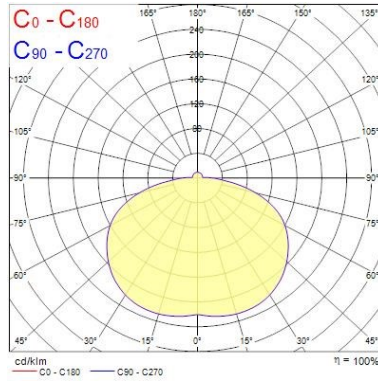

TECHNICAL DRAWINGS





Lumina

Lumina Sync LED 2700K


3039981


Lumiance 3039981


 This luminaire contains built in LED lamps.

 } LED


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } LED

The lamps cannot be changed in the luminaire.

Lumiance 3039981  874/2012