

Myriad V LED - IP65 Glass White Bezel

MYRD IP ST 2.7K DALI SIL WBEZ
2059238



Product features

- MYRD IP ST 2.7K DALI SIL WBEZ



PRODUCT OVERVIEW

IPC Code	2059238
Product name	MYRD IP ST 2.7K DALI SIL WBEZ
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (lm)	1241
Luminaire efficacy (lm/W)	124
LOR (%)	100
Colour temperature (K)	2700
CRI (Ra)	85
Beam Angle (°)	28
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	1
Average life (Nominal) (h)	50000
Housing colour	Silver Trim
IP rating	IP65
IK rating	IK02
Product EAN number	5025768592388
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2059238
Product name	MYRD IP ST 2.7K DALI SIL WBEZ
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed

Myriad V LED - IP65 Glass White Bezel

MYRD IP ST 2.7K DALI SIL WBEZ
2059238

Environment	Integral
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW008
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	1241
Luminaire efficacy (lm/W)	124
LOR (%)	100
Colour temperature (K)	2700
CRI (Ra)	85
Adjustable chromaticity	N
Beam Angle (°)	28
Distribution type	Direct

Electrical data

Total power consumption (W)	10
Mains voltage (V)	230-240V~
Electrical protection	Class II
Control gear type	Electronic
Transformer required	Yes
Minimum dimming level (%)	1

Lifetime data

Average life (Nominal) (h)	50000
Average life (Rated) (h)	50000

Physical data


Housing colour	Silver Trim
IP rating	IP65
IK rating	IK02
Diffuser finish	Silver Trim White Bezel
Reflector finish	Aluminium
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	90
Weight (kg)	0.44
Recessed Depth (mm)	72

Packaging

Single packaging type	Carton
Product EAN number	5025768592388
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768592388
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

Myriad V LED - IP65 Glass White Bezel MYRD IP ST 2.7K DALI SIL WBEZ 2059238


PHOTOMETRY

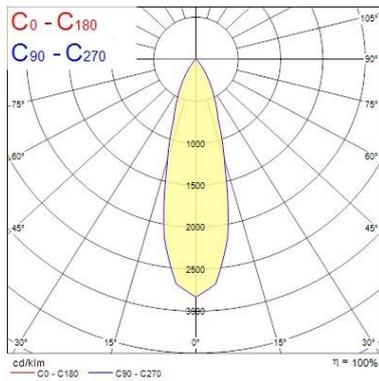

Distance [m]	Cone diameter [m]	E _(0°) [lx]	E _(C0) [lx]
0.5	0.28	14053	6418
1.0	0.51	3513	1658
1.5	0.77	1581	713
2.0	1.03	878	401
2.5	1.28	582	287
3.0	1.54	390	178

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 28.6°)

TECHNICAL DRAWINGS



Dimensions (mm)