

Myriad V LED - IP65 Glass White Bezel

MYRD IP ST 4K PHDM SIL WBEZ
2059245



Product features

- MYRD IP ST 4K PHDM SIL WBEZ



PRODUCT OVERVIEW

IPC Code	2059245
Product name	MYRD IP ST 4K PHDM SIL WBEZ
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (lm)	1132
Luminaire efficacy (lm/W)	113
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	85
Beam Angle (°)	28
Photobiological Risk Group	-
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	10
Average life (Nominal) (h)	50000
Housing colour	Silver Trim
IP rating	IP65
IK rating	IK02
Product EAN number	5025768592456
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2059245
Product name	MYRD IP ST 4K PHDM SIL WBEZ
Technology	LED
Housing	Aluminium

Myriad V LED - IP65 Glass White Bezel

MYRD IP ST 4K PHDM SIL WBEZ
2059245

Mount	Ceiling recessed
Environment	Integral
General application	Hospitality,Office,Retail,Residential & Consumer
Operating temperature rated (°C)	25
Certifications	EUNEW008
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	1132
Luminaire efficacy (lm/W)	113
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	85
Adjustable chromaticity	N
Beam Angle (°)	28
Distribution type	Direct
Photobiological Risk Group	-

Electrical data

Total power consumption (W)	10
Mains voltage (V)	230-240V~
Electrical protection	Class II
Control gear type	Electronic
Transformer required	Yes
Minimum dimming level (%)	10
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lumen maintenance - L70 B50	50000
Average life (Nominal) (h)	50000

Physical data

Housing colour	Silver Trim
IP rating	IP65
IK rating	IK02
Diffuser finish	Silver Trim White Bezel
Reflector finish	Aluminium
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	90
Weight (kg)	0.44
Recessed Depth (mm)	72

Packaging

Single packaging type	Carton
Product EAN number	5025768592456
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768592456

Myriad V LED - IP65 Glass White Bezel MYRD IP ST 4K PHDM SIL WBEZ 2059245


Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

PHOTOMETRY


0.5	0.25	E(0°) E(C0)	12393 5652
1.0	0.51	E(0°) E(C0)	3096 1421
1.5	0.76	E(0°) E(C0)	1377 631
2.0	1.01	E(0°) E(C0)	775 355
2.5	1.27	E(0°) E(C0)	496 227
3.0	1.52	E(0°) E(C0)	344 156

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 26.4°)

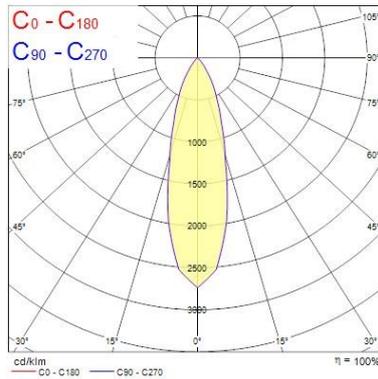

TECHNICAL DRAWINGS



Myriad V LED - IP65 Glass White Bezel MYRD IP ST 4K PHDM SIL WBEZ 2059245

Concord 2059245

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

Concord 2059245  874/2012