

## Ascent 100 II Arch 120

ASCENT 100 II ARCH 900 4K STD 120  
2060515



### Product features

- The ASCENT 100 II ARCH 900 4K STD 120 is a high efficient non dimmable downlight luminaire, luminous flux: 931lm, luminaire efficacy: 116lm/W, Colour rendering index Ra >80, Colour temperature: 4000K Neutral White, Average life rated at 50,000Hrs, Class II, Protection rating IP44/IK02, Cut out dimensions: 137mm



## PRODUCT OVERVIEW

IPC Code	2060515
Product name	ASCENT 100 II ARCH 900 4K STD 120
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
General application	Hospitality, Retail, Office,
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4260838
Fixture luminous flux (lm)	931
Luminaire efficacy (lm/W)	116
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Glare control	21.6
Photobiological Risk Group	Group 0
Total power consumption (W)	8
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Remote
Dimmable	No
Housing colour	White - RAL9016
IP rating	IP40
IK rating	IK02
Product EAN number	5025768605156
Lamps	Yes
Included lamp	INTEGRATED LED

## DATA TABLE

### General data

IPC Code	2060515
----------	---------

## Ascent 100 II Arch 120

ASCENT 100 II ARCH 900 4K STD 120  
2060515

Product name	ASCENT 100 II ARCH 900 4K STD 120
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
General application	Hospitality,Retail,Office,
Operating temperature range (°C)	0-25
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4260838

### Optical data

Fixture luminous flux (lm)	931
Luminaire efficacy (lm/W)	116
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam angle (Rated) (°)	85
Distribution type	Direct
Glare control	21.6
Photobiological Risk Group	Group 0

### Electrical data

Total power consumption (W)	8
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Remote
Dimmable	No
Drive current (mA)	500
Inrush Current (A)	45
Inrush Duration (µs)	20
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	50
Max. Luminaires per 16A C Breaker	80

### Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Lumen maintenance - L90 B20	48000
Lumen maintenance - L90 B10	34000

### Physical data

## Ascent 100 II Arch 120


ASCENT 100 II ARCH 900 4K STD 120  
2060515

Housing colour	White - RAL9016
IP rating	IP40
IK rating	IK02
Diffuser finish	Opal
Diffuser material	Acrylic
Reflector finish	Arch
Nominal Product Width (mm)	150
Nominal Product Height (mm)	94
Nominal Product Diameter (mm)	120
Weight (kg)	0.715

### Packaging

Single packaging type	Carton
Product EAN number	5025768605156
Packaging single length / height (cm)	25.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	25.0
DUN14 (outer)	05025768605156
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	20.0
Packaging outer depth (cm)	25.0


## PHOTOMETRY

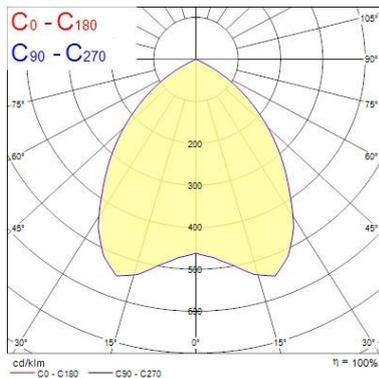

Distance [m]	Cone diameter [m]	E <sub>0°</sub> [lx]	E <sub>43.3°</sub> [lx]
0.5	0.94	1719	394
1.0	1.88	430	99
1.5	2.83	191	44
2.0	3.77	107	25
2.5	4.71	69	16
3.0	5.65	48	11

Distance [m]      Cone diameter [m]      Illuminance [lx]  
C0 - C180 (Half beam angle: 86.6°)

## TECHNICAL DRAWINGS



Ascent 100 II Arch 120  
ASCENT 100 II ARCH 900 4K STD 120  
2060515

**Concord** 2060515

 This luminaire contains built in LED lamps.



} L  
E  
D

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.



} L  
E  
D

The lamps cannot be changed in the luminaire.

**Concord** 2060515  874/2012