

Ascent 100 II Arch 120

ASCENT 100 II ARCH 2000 4K STD 120
2060535



Product features

- The ASCENT 100 II ARCH 2000 4K STD 120 is a high efficient non dimmable downlight luminaire, luminous flux: 2029lm, luminaire efficacy: 113lm/W, Colour rendering index Ra >80, Colour temperature: 4000K Neutral White, Average life rated at 50,000Hrs, Class II, Protection rating IP44/IK02, Cut out dimensions: 137mm



PRODUCT OVERVIEW

IPC Code	2060535
Product name	ASCENT 100 II ARCH 2000 4K STD 120
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
General application	Hospitality, Retail, Office,
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4260846
Fixture luminous flux (lm)	2029
Luminaire efficacy (lm/W)	113
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Glare control	24.3
Photobiological Risk Group	Group 0
Total power consumption (W)	18
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Remote
Dimmable	No
Housing colour	White - RAL9016
IP rating	IP40
IK rating	IK02
Product EAN number	5025768605354
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2060535
----------	---------

Ascent 100 II Arch 120

ASCENT 100 II ARCH 2000 4K STD 120
2060535

Product name	ASCENT 100 II ARCH 2000 4K STD 120
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
General application	Hospitality,Retail,Office,
Operating temperature range (°C)	0-25
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4260846

Optical data

Fixture luminous flux (lm)	2029
Luminaire efficacy (lm/W)	113
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam angle (Rated) (°)	85
Distribution type	Direct
Glare control	24.3
Photobiological Risk Group	Group 0

Electrical data

Total power consumption (W)	18
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Remote
Dimmable	No
Drive current (mA)	1200
Inrush Current (A)	45
Inrush Duration (µs)	20
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	31
Max. Luminaires per 16A C Breaker	51

Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Lumen maintenance - L90 B20	48000
Lumen maintenance - L90 B10	34000

Physical data

Ascent 100 II Arch 120

ASCENT 100 II ARCH 2000 4K STD 120
2060535

Housing colour	White - RAL9016
IP rating	IP40
IK rating	IK02
Diffuser finish	Opal
Diffuser material	Acrylic
Reflector finish	Arch
Nominal Product Width (mm)	150
Nominal Product Height (mm)	94
Nominal Product Diameter (mm)	120
Weight (kg)	0.715


Packaging

Single packaging type	Carton
Product EAN number	5025768605354
Packaging single length / height (cm)	25.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	25.0
DUN14 (outer)	05025768605354
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	20.0
Packaging outer depth (cm)	25.0


PHOTOMETRY

Distance [m]	Cone diameter [m]	E ₀ [lx]	E ₁ [lx]
0.5	0.94	3782	683
1.0	1.88	946	213
1.5	2.83	420	96
2.0	3.77	236	53
2.5	4.71	151	34
3.0	5.65	105	24

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 96.6°)

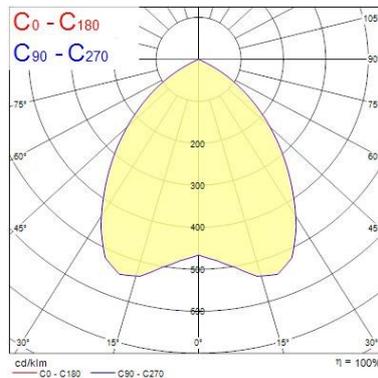

TECHNICAL DRAWINGS



Ascent 100 II Arch 120
ASCENT 100 II ARCH 2000 4K STD 120
2060535

Concord 2060535

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

Concord 2060535  874/2012