

Myriad V LED - IP65 Glass Chrome Bezel

MYRD IP FL 3K DALI SIL CBEZ

2058921



Product features

- MYRD IP FL 3K DALI SIL CBEZ



PRODUCT OVERVIEW

IPC Code	2058921
Product name	MYRD IP FL 3K DALI SIL CBEZ
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality, Office, Retail
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (lm)	988
Luminaire efficacy (lm/W)	99
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	85
Beam Angle (°)	46
Photobiological Risk Group	-
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	1
Average life (Nominal) (h)	50000
Housing colour	Silver Trim
IP rating	IP65
IK rating	IK02
Product EAN number	5025768589210
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2058921
Product name	MYRD IP FL 3K DALI SIL CBEZ
Technology	LED
Housing	Aluminium

Myriad V LED - IP65 Glass Chrome Bezel

MYRD IP FL 3K DALI SIL CBEZ
2058921

Mount	Ceiling recessed
Environment	Integral
General application	Hospitality, Office, Retail
Operating temperature rated (°C)	25
Certifications	EUNEW008
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	988
Luminaire efficacy (lm/W)	99
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	85
Adjustable chromaticity	N
Beam Angle (°)	46
Distribution type	Direct
Photobiological Risk Group	-

Electrical data

Total power consumption (W)	10
Mains voltage (V)	230-240V~
Electrical protection	Class II
Control gear type	Electronic
Transformer required	Yes
Minimum dimming level (%)	1
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lumen maintenance - L70 B50	50000
Average life (Nominal) (h)	50000

Physical data

Housing colour	Silver Trim
IP rating	IP65
IK rating	IK02
Diffuser finish	Silver Trim Chrome Bezel
Reflector finish	Aluminium
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	90
Weight (kg)	0.44
Recessed Depth (mm)	72

Packaging


Single packaging type	Carton
Product EAN number	5025768589210
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768589210

Myriad V LED - IP65 Glass Chrome Bezel

MYRD IP FL 3K DALI SIL CBEZ
2058921

Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5


PHOTOMETRY

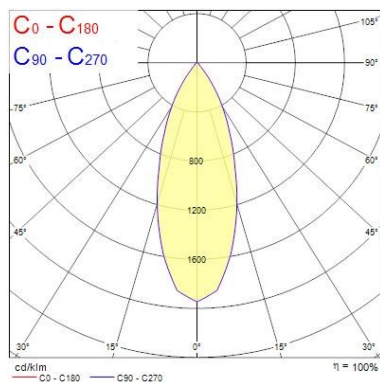

0.5	0.34	E(0°) E(C0)	18.9°	7690 3289
1.0	0.68	E(0°) E(C0)	18.9°	1923 817
1.5	1.03	E(0°) E(C0)	18.9°	988 383
2.0	1.37	E(0°) E(C0)	18.9°	481 204
2.5	1.71	E(0°) E(C0)	18.9°	308 131
3.0	2.05	E(0°) E(C0)	18.9°	214 91

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 37.8°)
Illuminance [lx]

TECHNICAL DRAWINGS



Myriad V LED - IP65 Glass Chrome Bezel MYRD IP FL 3K DALI SIL CBEZ 2058921

