

## Myriad V LED - IP65 Glass Chrome Bezel

MYRD IP FL 4K PHDMEM SIL CBEZ  
2058926



### Product features

- MYRD IP FL 4K PHDMEM SIL CBEZ



### PRODUCT OVERVIEW

IPC Code	2058926
Product name	MYRD IP FL 4K PHDMEM SIL CBEZ
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality, Office, Retail, Residential & Consumer
Certifications	EUNEW001
ETIM Class	EC001744
Fixture luminous flux (lm)	977
Luminaire efficacy (lm/W)	81
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	85
Beam Angle (°)	46
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	352
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	10
Average life (Nominal) (h)	50000
Housing colour	Silver Trim
IP rating	IP65
IK rating	IK02
Product EAN number	5025768589265
Luminous flux (emergency) (lm)	352
Included lamp	INTEGRATED LED

### DATA TABLE

#### General data

IPC Code	2058926
----------	---------

## Myriad V LED - IP65 Glass Chrome Bezel

*MYRD IP FL 4K PHDMEM SIL CBEZ*  
2058926

Product name	MYRD IP FL 4K PHDMEM SIL CBEZ
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality,Office,Retail,Residential & Consumer
Operating temperature rated (°C)	25
Certifications	EUNEW001
ETIM Class	EC001744

### Optical data

Fixture luminous flux (lm)	977
Luminaire efficacy (lm/W)	81
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	85
Adjustable chromaticity	N
Beam Angle (°)	46
Distribution type	Direct
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	352
Emergency duration (h)	3

### Electrical data

Total power consumption (W)	12
Mains voltage (V)	230-240V~
Electrical protection	Class II
Control gear type	Electronic
Transformer required	Yes
Minimum dimming level (%)	10
Nominal Frequency (Hz)	50/60Hz

### Lifetime data

Lumen maintenance - L70 B50	50000
Average life (Nominal) (h)	50000

### Physical data

Housing colour	Silver Trim
IP rating	IP65
IK rating	IK02
Diffuser finish	Silver Trim Chrome Bezel
Reflector finish	Aluminium
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	90
Weight (kg)	1.44
Recessed Depth (mm)	72


### Packaging

Single packaging type	Carton
-----------------------	--------

## Myriad V LED - IP65 Glass Chrome Bezel MYRD IP FL 4K PHDMEM SIL CBEZ 2058926


Product EAN number	5025768589265
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768589265
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

### PHOTOMETRY

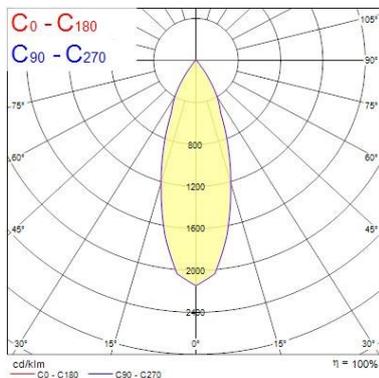

Distance [m]	Cone diameter [m]	E(0°) E(C0)	17.6°	35.2°
0.5	0.32	8398	3541	
1.0	0.63	2096	910	
1.5	0.95	932	405	
2.0	1.27	524	233	
2.5	1.59	335	146	
3.0	1.90	233	101	

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 35.2°)

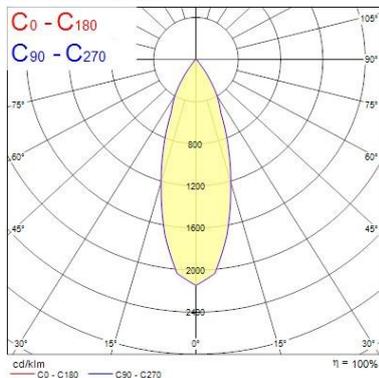

Distance [m]	Cone diameter [m]	E(0°) E(C0)	17.6°	35.2°
0.5	0.32	3021	1312	
1.0	0.63	755	330	
1.5	0.95	336	146	
2.0	1.27	189	82	
2.5	1.59	121	52	
3.0	1.90	84	36	

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 35.2°)

### TECHNICAL DRAWINGS



Myriad V LED - IP65 Glass Chrome Bezel  
MYRD IP FL 4K PHDMEM SIL CBEZ  
2058926

**Concord** 2058926

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

**Concord** 2058926  874/2012