

Myriad V LED - IP65 Glass Chrome Bezel

MYRD IP ST 3K PHDM BLK CBEZ
2058956



Product features

- MYRIAD IP65 SPOT 3000K Phase dimmable with black reflector and chrome bezel.



PRODUCT OVERVIEW

| | |
|-----------------------------|--|
| IPC Code | 2058956 |
| Product name | MYRD IP ST 3K PHDM BLK CBEZ |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling recessed |
| Environment | Integral |
| General application | Hospitality,Office,Retail,Residential & Consumer |
| Certifications | EUNEW008 |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 1106 |
| Luminaire efficacy (lm/W) | 111 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| CRI (Ra) | 85 |
| Beam Angle (°) | 28 |
| Photobiological Risk Group | - |
| Total power consumption (W) | 10 |
| Electrical protection | Class II |
| Control gear type | Electronic |
| Minimum dimming level (%) | 10 |
| Average life (Nominal) (h) | 50000 |
| Housing colour | Black Trim |
| IP rating | IP65 |
| IK rating | IK02 |
| Product EAN number | 5025768589562 |
| Lamps | Yes |
| Included lamp | INTEGRATED LED |

DATA TABLE

General data

| | |
|--------------|-----------------------------|
| IPC Code | 2058956 |
| Product name | MYRD IP ST 3K PHDM BLK CBEZ |
| Technology | LED |

Myriad V LED - IP65 Glass Chrome Bezel

MYRD IP ST 3K PHDM BLK CBEZ
2058956

| | |
|----------------------------------|--|
| Housing | Aluminium |
| Mount | Ceiling recessed |
| Environment | Integral |
| General application | Hospitality,Office,Retail,Residential & Consumer |
| Operating temperature rated (°C) | 25 |
| Certifications | EUNEW008 |
| ETIM Class | EC001744 |

Optical data

| | |
|----------------------------|--------|
| Fixture luminous flux (lm) | 1106 |
| Luminaire efficacy (lm/W) | 111 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| CRI (Ra) | 85 |
| Adjustable chromaticity | N |
| Beam Angle (°) | 28 |
| Distribution type | Direct |
| Photobiological Risk Group | - |

Electrical data

| | |
|-----------------------------|------------|
| Total power consumption (W) | 10 |
| Mains voltage (V) | 230-240V~ |
| Electrical protection | Class II |
| Control gear type | Electronic |
| Transformer required | Yes |
| Minimum dimming level (%) | 10 |
| Nominal Frequency (Hz) | 50/60Hz |

Lifetime data

| | |
|-----------------------------|-------|
| Lumen maintenance - L70 B50 | 50000 |
| Average life (Nominal) (h) | 50000 |

Physical data

| | |
|-------------------------------|-------------------------|
| Housing colour | Black Trim |
| IP rating | IP65 |
| IK rating | IK02 |
| Diffuser finish | Black Trim Chrome Bezel |
| Reflector finish | Aluminium |
| Nominal Product Height (mm) | 72 |
| Nominal Product Diameter (mm) | 90 |
| Weight (kg) | 0.44 |
| Recessed Depth (mm) | 72 |

Packaging

| | |
|---------------------------------------|---------------|
| Single packaging type | Carton |
| Product EAN number | 5025768589562 |
| Packaging single length / height (cm) | 17.5 |
| Packaging single width (cm) | 15.0 |
| Packaging single depth (cm) | 17.5 |

Myriad V LED - IP65 Glass Chrome Bezel MYRD IP ST 3K PHDM BLK CBEZ 2058956


| | |
|--------------------------------------|----------------|
| DUN14 (outer) | 05025768589562 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 17.5 |
| Packaging outer width (cm) | 15.0 |
| Packaging outer depth (cm) | 17.5 |

PHOTOMETRY


| | | | |
|-----|------|----------------|---------------|
| 0.5 | 0.26 | E(0°) E(C0) | 12624 8720 |
| 1.0 | 0.51 | E(0°) E(C0) | 3131 1430 |
| 1.5 | 0.77 | E(0°) E(C0) | 1392 635 |
| 2.0 | 1.03 | E(0°) E(C0) | 793 359 |
| 2.5 | 1.28 | E(0°) E(C0) | 501 229 |
| 3.0 | 1.54 | E(0°) E(C0) | 348 159 |

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 28.5°)

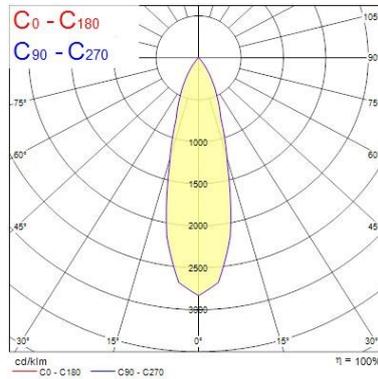

TECHNICAL DRAWINGS



Myriad V LED - IP65 Glass Chrome Bezel
MYRD IP ST 3K PHDM BLK CBEZ
2058956

Concord 2058956

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

Concord 2058956  874/2012