

Hydroproof LED G3 Quick connector


HYDROPROOF LED G3 1500mm Twin 4K QC MW

0048832



Product features

- Hydroproof, integrated LED chemical resistant weatherproof luminaire with quick connector, UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. GRP housing, PMMA diffuser, Non dimmable, 4000K, CRI80, 6900 lm, 48 W, 144 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK02, IP65.

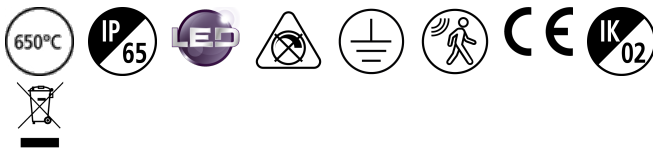

PRODUCT OVERVIEW

IPC Code	0048832
Product name	HYDROPROOF LED G3 1500mm Twin 4K QC MW
Technology	LED
Housing	GRP
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Certifications	EUNEW023
ETIM Class	EC000109
Fixture luminous flux (lm)	6900
Luminaire efficacy (lm/W)	144
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Photobiological Risk Group	RG1
Total power consumption (W)	48
Electrical protection	Class I
Control gear type	Electronic (constant current)
Dimmable	No
Average life (Nominal) (h)	50000
Housing colour	Grey
IP rating	IP65
IK rating	IK02
Product EAN number	5410288488325
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

Hydroproof LED G3 Quick connector

HYDROPROOF LED G3 1500mm Twin 4K QC MW

0048832

General data

IPC Code	0048832
Product name	HYDROPROOF LED G3 1500mm Twin 4K QC MW
Technology	LED
Housing	GRP
Mount	Surface, ceiling mounting, horizontally and vertically wall mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-20°C to +40°C
Certifications	EUNEW023
ETIM Class	EC000109

Optical data

Fixture luminous flux (lm)	6900
Luminaire efficacy (lm/W)	144
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	100
Distribution type	Direct
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	48
Mains voltage (V)	220-240V~
Mains frequency (Hz)	50/60Hz
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic (constant current)
Dimmable	No
Drive current (mA)	300
Inrush Current (A)	5
Inrush Duration (µs)	37
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	40
Max. Luminaires per 13A C Breaker	50
Max. Luminaires per 16A C Breaker	60
Max. Luminaires per 20A C Breaker	80
Max. Luminaires per 10A B Breaker	35
Max. Luminaires per 13A B Breaker	45
Max. Luminaires per 16A B Breaker	55
Max. Luminaires per 20A B Breaker	70

Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L80 B10	60000

Hydroproof LED G3 Quick connector

HYDROPROOF LED G3 1500mm Twin 4K QC MW

0048832

Lumen maintenance - L90 B50	60000
Average life (Nominal) (h)	50000

Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK02
Diffuser finish	Clear
Diffuser material	PMMA
Nominal Product Length (mm)	1578
Nominal Product Width (mm)	110
Nominal Product Height (mm)	78
Weight (kg)	2.65



Packaging

Single packaging type	Carton
Product EAN number	5410288488325
Packaging single length / height (cm)	167.2
Packaging single width (cm)	11.6
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288488325
Units per outer package	1
Packaging outer length / height (cm)	167.2
Packaging outer width (cm)	11.6
Packaging outer depth (cm)	8.4

Safety data

Dry applications use only	No
---------------------------	----

PHOTOMETRY

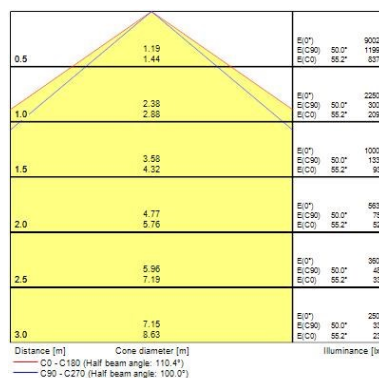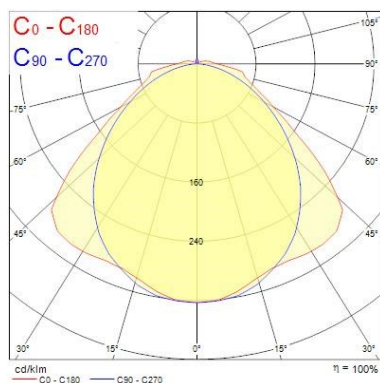



TECHNICAL DRAWINGS

Hydroproof LED G3 Quick connector HYDROPROOF LED G3 1500mm Twin 4K QC MW 0048832





SYLVANIA 0048832


 This luminaire contains built in LED lamps.


 } LED


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.


 } LED

The lamps cannot be changed in the luminaire.

SYLVANIA 0048832  874/2012



Hydroproof LED G3 Quick connector
HYDROPROOF LED G3 1500mm Twin 4K QC MW
0048832
