

Optix Recessed 600x600 Standard Output

OPTIX RECESSED 600x600 2L SO 4000K ALU
0044130



Product features

- OPTIX RECESSED 600x600 2L SO 4000K ALU is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 600x600 mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. Constant current driver. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 2800lm. Power consumption 21W. Luminaire efficacy 133lm/W. Lumen maintenance of L90B50 > 72000h, L90B10 = 46000h. UGR<16, Luminance at 65°<200 Cd/m2, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.



PRODUCT OVERVIEW

IPC Code	0044130
Product name	OPTIX RECESSED 600x600 2L SO 4000K ALU
Technology	LED (3 SDCM)
Housing	STEEL
Mount	Recessed
Fixture rating	Enclosed
General application	Office, Education,
Certifications	EUNEW008
ETIM Class	EC002892
E-number FI	4276534
Fixture luminous flux (lm)	2800
Luminaire efficacy (lm/W)	133
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	16
Photobiological Risk Group	0
Total power consumption (W)	21
Electrical protection	Class I
Control gear type	Electronic (constant current)
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016
IP rating	IP20
IK rating	IK07
Product EAN number	5410288441306
Chromaticity coordinate Y	0.3797
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	0044130
----------	---------

Optix Recessed 600x600 Standard Output

OPTIX RECESSED 600x600 2L SO 4000K ALU
0044130

Product name	OPTIX RECESSED 600x600 2L SO 4000K ALU
Technology	LED (3 SDCM)
Housing	STEEL
Mount	Recessed
Fixture rating	Enclosed
General application	Office, Education,
Certifications	EUNEW008
ETIM Class	EC002892
E-number FI	4276534

Optical data

Fixture luminous flux (lm)	2800
Luminaire efficacy (lm/W)	133
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	16
Photobiological Risk Group	0

Electrical data

Total power consumption (W)	21
Starting time (max) (s)	<0.5
Mains voltage (V)	220-240V~
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) = xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic (constant current)
Dimmable	No
Drive current (mA)	400
Inrush Current (A)	15
Inrush Duration (µs)	250
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	40
Max. Luminaires per 13A C Breaker	51
Max. Luminaires per 16A C Breaker	63
Max. Luminaires per 20A C Breaker	80
Max. Luminaires per 10A B Breaker	24
Max. Luminaires per 13A B Breaker	31
Max. Luminaires per 16A B Breaker	38
Max. Luminaires per 20A B Breaker	48

Lifetime data

Lumen maintenance - L70 B50	72000
Lumen maintenance - L80 B10	72000
Lumen maintenance - L90 B50	72000
Lumen maintenance - L90 B20	50000

Optix Recessed 600x600 Standard Output

OPTIX RECESSED 600x600 2L SO 4000K ALU
0044130

Lumen maintenance - L90 B10	46000
-----------------------------	-------



Physical data

Housing colour	RAL 9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Satin
Diffuser material	Polycarbonate
Nominal Product Length (mm)	596
Nominal Product Width (mm)	596
Nominal Product Height (mm)	38
Weight (kg)	5.0

Packaging


Single packaging type	Carton
Product EAN number	5410288441306
Packaging single length / height (cm)	62.0
Packaging single width (cm)	6.5
Packaging single depth (cm)	65.0
DUN14 (outer)	05410288441306
Units per outer package	1
Packaging outer length / height (cm)	62.0
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	65.0

PHOTOMETRY

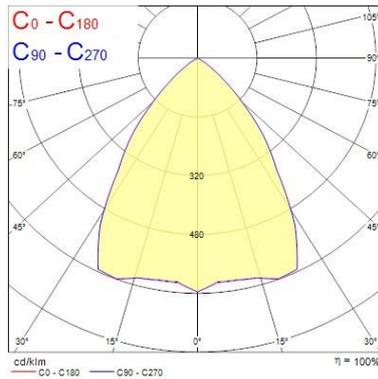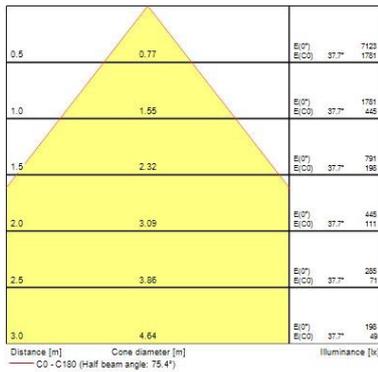

TECHNICAL DRAWINGS

Optix Recessed 600x600 Standard Output *OPTIX RECESSED 600x600 2L SO 4000K ALU* 0044130



SYLVANIA 0044130

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

Optix Recessed 600x600 Standard Output *OPTIX RECESSED 600x600 2L SO 4000K ALU* 0044130

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

SYLVANIA 0044130 874/2012

A++
A+
A
~~B~~
~~C~~
~~D~~
~~E~~

LED