

## RANA Linear Recessed - Opal Diffuser

RANA LINEAR R 3KLM NW OPAL  
0052364

### Product features

- Ceiling recessed LED Linear luminaire with Opal diffuser, Dimensions: 1154mm x 90mm x 91mm, Direct, White Body, Neutral White LED (4000K), 3270lm, 31W, 105lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse), Low LED Flicker (+/-5%), UGR<23, L90B10 at 50,000 hours, Electric Class1, Glow Wire Test 850°C, Can be covered with building insulation of Glass wool type



### PRODUCT OVERVIEW

IPC Code	0052364
Product name	RANA LINEAR R 3KLM NW OPAL
Technology	LED
Housing	Steel
Mount	Ceiling recessed
Fixture rating	Enclosed
Environment	Internal
General application	Office,Hospitality,Retail,Education,
Certifications	EUNEW008
ETIM Class	EC002892
Fixture luminous flux (lm)	3270
Luminaire efficacy (lm/W)	105.48
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Glare control	UGR<23
Photobiological Risk Group	Group 0
Total power consumption (W)	31
Electrical protection	Class I
Control gear type	Electronic
Housing colour	White RAL 9016
IP rating	IP20
IK rating	IK07
Product EAN number	5410288523644
Lamps	Yes
Included lamp	INTEGRATED LED

### DATA TABLE

#### General data

IPC Code	0052364
----------	---------

## RANA Linear Recessed - Opal Diffuser

*RANA LINEAR R 3KLM NW OPAL*  
0052364

Product name	RANA LINEAR R 3KLM NW OPAL
Technology	LED
Housing	Steel
Mount	Ceiling recessed
Fixture rating	Enclosed
Environment	Internal
General application	Office,Hospitality,Retail,Education,
Operating temperature range (°C)	-25 to +40
Certifications	EUNEW008
ETIM Class	EC002892

### Optical data

Fixture luminous flux (lm)	3270
Luminaire efficacy (lm/W)	105.48
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Distribution type	Direct
Glare control	UGR<23
Photobiological Risk Group	Group 0

### Electrical data

Total power consumption (W)	31
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic
Drive current (mA)	300
Inrush Current (A)	45
Inrush Duration (µs)	100
Glow Wire Test (°C)	850
Lamp Energy Label (class)	A++
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 16A C Breaker	51

### Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Lumen maintenance - L90 B20	60000
Lumen maintenance - L90 B10	60000

### Physical data

## RANA Linear Recessed - Opal Diffuser


RANA LINEAR R 3KLM NW OPAL  
0052364

Housing colour	White RAL 9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal Diffuser
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1150
Nominal Product Width (mm)	90
Nominal Product Height (mm)	91
Weight (kg)	3.05
Recessed Depth (mm)	90

### Packaging

Single packaging type	Carton
Product EAN number	5410288523644
Packaging single length / height (cm)	117.09
Packaging single width (cm)	10.52
Packaging single depth (cm)	11.51
DUN14 (outer)	5410288523644
Units per outer package	1
Packaging outer length / height (cm)	117.09
Packaging outer width (cm)	10.52
Packaging outer depth (cm)	11.51


## PHOTOMETRY

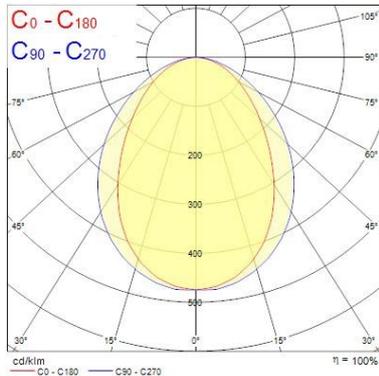

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	1.14	E(0°) 48.7°	620
	0.80	E(C90) 48.7°	384
		E(C0) 38.8°	1483
1.0	2.28	E(0°) 48.7°	152
	1.60	E(C90) 48.7°	224
		E(C0) 38.8°	371
1.5	3.41	E(0°) 48.7°	69
	2.39	E(C90) 48.7°	99
		E(C0) 38.8°	165
2.0	4.55	E(0°) 48.7°	38
	3.19	E(C90) 48.7°	56
		E(C0) 38.8°	98
2.5	5.69	E(0°) 48.7°	24
	3.99	E(C90) 48.7°	38
		E(C0) 38.8°	59
3.0	6.83	E(0°) 48.7°	17
	4.79	E(C90) 48.7°	24
		E(C0) 38.8°	41

Distance [m] Cone diameter [m] Illuminance [lx]  
 C0 - C180 (Half beam angle: 77.2°)  
 C90 - C270 (Half beam angle: 97.4°)

## TECHNICAL DRAWINGS

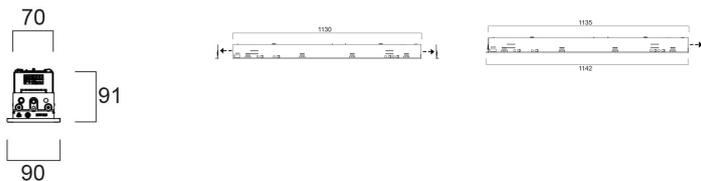

## RANA Linear Recessed - Opal Diffuser

RANA LINEAR R 3KLM NW OPAL  
0052364



**ENERGY LABEL**  
SYLVANIA 0052364  
енергия · ενεργεια

 This luminaire is compatible with bulbs of the energy classes:

**A++** **A++**

**A+**

**A**

**B**

**C**

**D**

This luminaire is sold with a bulb of the energy class:

**E**

kWh/1000h