

Mini Continuum II - Direct/Indirect

MC2 D/I 1.2M 3K DALI WHT OPAL

2093089



Product features

- 2093089 MC2 D/I 1.2M 3K DALI WHT OPAL Continuous lines of LED light, white RAL 9016, direct/indirect distribution (65/35), various accessories available, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: opal, colour temperature: 3000K warm white, total system power: 32W, total fixture output: 3850lm, luminaire efficacy: 120lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifetime: 60,000 hours at 90% of the original output (L90), energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: (Direct) 800mA + (Indirect) 350mA, electronic driver, DALI dimmable, direct/indirect independently addressable, electrical protection: CLASS I, IP20, suitable for internal environment only.



PRODUCT OVERVIEW

IPC Code	2093089
Product name	MC2 D/I 1.2M 3K DALI WHT OPAL
Technology	LED
Housing	Aluminium
Mount	Suspended
Environment	Internal
General application	Education, Hospitality, Office, Retail
Certifications	EUNEW009
ETIM Class	EC001743
E-number FI	4237824
Fixture luminous flux (lm)	3850
Luminaire efficacy (lm/W)	120
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	UGR <21
Photobiological Risk Group	Exempt Group 0
Total power consumption (W)	32
Electrical protection	Class I
Control gear type	DALI
Minimum dimming level (%)	1
Average life (Nominal) (h)	50000
Housing colour	White
IP rating	IP20
Product EAN number	5025768930890
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

Mini Continuum II - Direct/Indirect

MC2 D/I 1.2M 3K DALI WHT OPAL
2093089

General data

IPC Code	2093089
Product name	MC2 D/I 1.2M 3K DALI WHT OPAL
Technology	LED
Housing	Aluminium
Mount	Suspended
Environment	Internal
General application	Education,Hospitality,Office,Retail
Operating temperature rated (°C)	25
Certifications	EUNEW009
ETIM Class	EC001743
E-number FI	4237824

Optical data

Fixture luminous flux (lm)	3850
Luminaire efficacy (lm/W)	120
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Adjustable chromaticity	N
Distribution type	Direct/Indirect
Glare control	UGR <21
Photobiological Risk Group	Exempt Group 0

Electrical data

Total power consumption (W)	32
Mains voltage (V)	220-240V~
Lamp power factor	0.95
Electrical protection	Class I
Control gear type	DALI
Minimum dimming level (%)	1
Drive current (mA)	800
Inrush Current (A)	30
Inrush Duration (µs)	200
Max. Luminaires per 16A C Breaker	48

Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Lumen maintenance - L90 B20	47000
Lumen maintenance - L90 B10	33000
Average life (Nominal) (h)	50000

Mini Continuum II - Direct/Indirect MC2 D/I 1.2M 3K DALI WHT OPAL 2093089


Physical data

Housing colour	White
IP rating	IP20
Diffuser finish	Opal
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1200
Nominal Product Width (mm)	54
Nominal Product Height (mm)	86
Weight (kg)	3.1

Packaging

Single packaging type	Carton
Product EAN number	5025768930890
Packaging single length / height (cm)	128.0
Packaging single width (cm)	15.0
Packaging single depth (cm)	15.0
DUN14 (outer)	05025768930890
Units per outer package	1
Packaging outer length / height (cm)	128.0
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	15.0

PHOTOMETRY

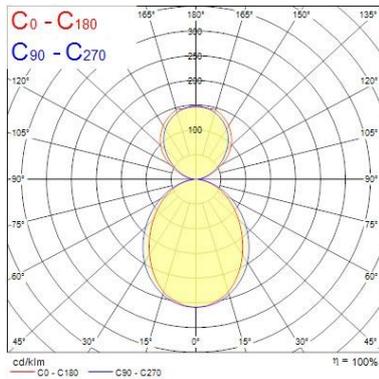


Distance [m]	Cone diameter [m]	E ₀ [lx]	E ₁₀ [lx]	E ₃₀ [lx]
0.5	1.13	976	48.8°	575
	0.94	774	43.2°	774
1.0	2.27	994	48.8°	144
	1.88	144	43.2°	195
1.5	3.40	442	48.8°	84
	2.82	84	43.2°	88
2.0	4.54	248	48.8°	39
	3.76	39	43.2°	45
2.5	5.67	159	48.8°	23
	4.70	23	43.2°	21
3.0	6.81	110	48.8°	16
	5.63	16	43.2°	21

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 96.4°)
— C90 - C270 (Half beam angle: 97.2°)

TECHNICAL DRAWINGS



Mini Continuum II - Direct/Indirect MC2 D/I 1.2M 3K DALI WHT OPAL 2093089

Concord 2093089

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

Concord 2093089  874/2012