

## SylSafe Bay


SylSafe Bay OA C EMC NM MS

0041740



### Product features

- SylSafe Bay OA C EMC NM MS is a dust and waterproof surface mounted emergency luminaire for industrial applications. Open area optics for standard mounting heights <4m. Non-maintained version for central battery systems. 217lm, 3W, IK03, IP65. Power Factor 0.44. Class II electrical construction.



## PRODUCT OVERVIEW

IPC Code	0041740
Product name	SylSafe Bay OA C EMC NM MS
Technology	LED
Type	LED
Mount	Surface mounted
General application	Office, Hospitality, Retail, Museums & Galleries, Education, Logistics & Industry,
Certifications	EUNEW002
ETIM Class	EC001957
Fixture luminous flux (lm)	217
Luminaire efficacy (lm/W)	72
Colour temperature (K)	5700
CRI (Ra)	75
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	200
Total power consumption (W)	3
Electrical protection	Class II
Control gear type	Emergency (3 hour non-maintained)
Average life (Nominal) (h)	35040
Housing colour	White
IP rating	IP65
IK rating	IK03
Product EAN number	5410288417400
Lamps	No
Included lamp	INTEGRATED LED

## DATA TABLE

### General data

IPC Code	0041740
Product name	SylSafe Bay OA C EMC NM MS
Technology	LED
Type	LED
Mount	Surface mounted

## SylSafe Bay

*SylSafe Bay OA C EMC NM MS*

0041740

General application	Office,Hospitality,Retail,Museums & Galleries,Education,Logistics & Industry,
Certifications	EUNEW002
ETIM Class	EC001957

### Optical data

Fixture luminous flux (lm)	217
Luminaire efficacy (lm/W)	72
Colour temperature (K)	5700
CRI (Ra)	75
Distribution type	Open Area
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	200
Emergency duration (h)	3

### Electrical data

Total power consumption (W)	3
Mains voltage (V)	230-240V~
Lamp power factor	0.44
Electrical protection	Class II
Control gear required	Yes
Control gear type	Emergency (3 hour non-maintained)
Drive current (mA)	46
kWh per 1000 hours burning time	3
Nominal Frequency (Hz)	50/60Hz

### Lifetime data

Average life (Nominal) (h)	35040
----------------------------	-------

### Physical data


Housing colour	White
IP rating	IP65
IK rating	IK03
Nominal Product Length (mm)	197
Nominal Product Width (mm)	197
Nominal Product Height (mm)	53

### Packaging


Product EAN number	5410288417400
DUN14 (outer)	05410288417400
Units per outer package	5
Packaging outer length / height (cm)	42.2
Packaging outer width (cm)	25.2
Packaging outer depth (cm)	13.2

## PHOTOMETRY

SylSafe Bay  
SylSafe Bay OA C EMC NM MS  
0041740

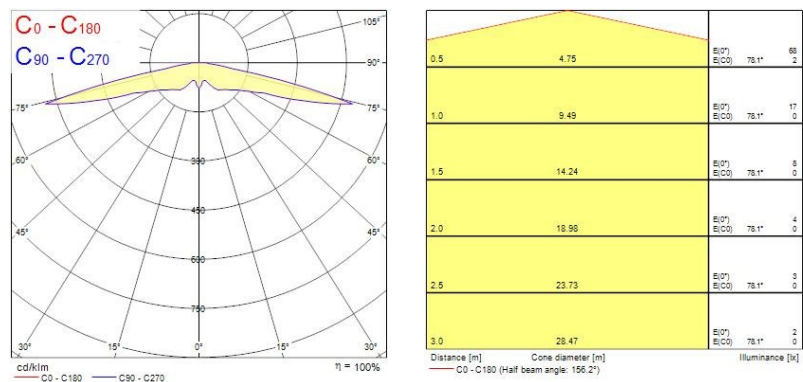

TECHNICAL DRAWINGS



## SylSafe Bay

*SylSafe Bay OA C EMC NM MS*

0041740

