

Sylproof Superia LED G3 DALI

SYLPROOF SUPERIA LED G3 1200mm Twin 4K DALI E3

0048709



Product features

- Sylproof Superia, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. L 1278 mm x W 110 mm x H 78 mm size, Polycarbonate housing, Polycarbonate diffuser, DALI dimmable, 3 hour emergency, 4000K, CRI80, 5400 lm, 38 W, 140 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK08, IP65.



PRODUCT OVERVIEW

IPC Code	0048709
Product name	SYLPROOF SUPERIA LED G3 1200mm Twin 4K DALI E3
Technology	LED
Housing	Polycarbonate
Fixture rating	Enclosed
General application	Logistics & Industry
Certifications	EUNEW002
ETIM Class	EC000109
Fixture luminous flux (lm)	5400
Luminaire efficacy (lm/W)	140
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	240
Total power consumption (W)	38
Electrical protection	Class I
Control gear type	DALI + Emergency
Dimmable	Yes
Minimum dimming level (%)	1
Average life (Nominal) (h)	50000
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288487090
Luminous flux (emergency) (lm)	240
Lamps	Yes
Included lamp	INTEGRATED LED

Sylproof Superia LED G3 DALI

SYLPROOF SUPERIA LED G3 1200mm Twin 4K DALI E3

0048709

DATA TABLE

General data

IPC Code	0048709
Product name	SYLPROOF SUPERIA LED G3 1200mm Twin 4K DALI E3
Technology	LED
Housing	Polycarbonate
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	0°C to +30°C
Certifications	EUNEW002
ETIM Class	EC000109

Optical data

Fixture luminous flux (lm)	5400
Luminaire efficacy (lm/W)	140
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Distribution type	Direct
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	240
Emergency duration (h)	3

Electrical data

Total power consumption (W)	38
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear required	No
Control gear type	DALI + Emergency
Dimmable	Yes
Minimum dimming level (%)	1
Drive current (mA)	300
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	DC/50/60Hz

Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Average life (Nominal) (h)	50000

Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Clear
Diffuser material	Polycarbonate

Sylproof Superia LED G3 DALI

SYLPROOF SUPERIA LED G3 1200mm Twin 4K DALI E3

0048709

Nominal Product Length (mm)	1278
Nominal Product Width (mm)	110
Nominal Product Height (mm)	78
Weight (kg)	2.21


Packaging

Single packaging type	Carton
Product EAN number	5410288487090
Packaging single length / height (cm)	137.2
Packaging single width (cm)	11.6
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288487090
Units per outer package	1
Packaging outer length / height (cm)	137.2
Packaging outer width (cm)	11.6
Packaging outer depth (cm)	8.4


Safety data

Dry applications use only	No
---------------------------	----

PHOTOMETRY

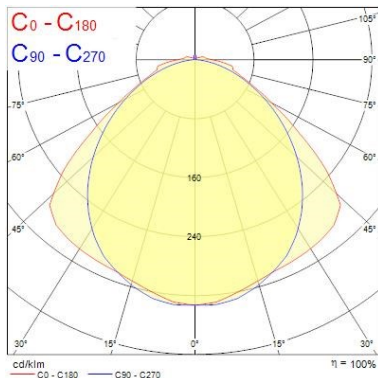

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	1.21	7189	50.4°	909
	1.45		55.4°	650
1.0	2.42	1790	50.4°	233
	2.90		55.4°	165
1.5	3.63	795	50.4°	103
	4.35		55.4°	77
2.0	4.84	447	50.4°	58
	5.80		55.4°	41
2.5	6.04	286	50.4°	37
	7.25		55.4°	26
3.0	7.25	190	50.4°	25
	8.70		55.4°	15

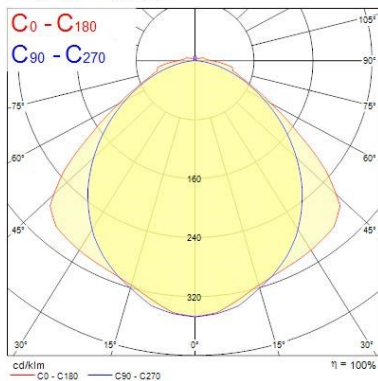


Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	1.15	339	49.1°	45
	1.41		54.7°	33
1.0	2.31	85	49.1°	12
	2.82		54.7°	8
1.5	3.46	38	49.1°	5
	4.24		54.7°	4
2.0	4.62	21	49.1°	3
	5.65		54.7°	2
2.5	5.77	14	49.1°	2
	7.06		54.7°	1
3.0	6.93	9	49.1°	1
	8.47		54.7°	1

Sylproof Superia LED G3 DALI

SYLPROOF SUPERIA LED G3 1200mm Twin 4K DALI E3
0048709

TECHNICAL DRAWINGS

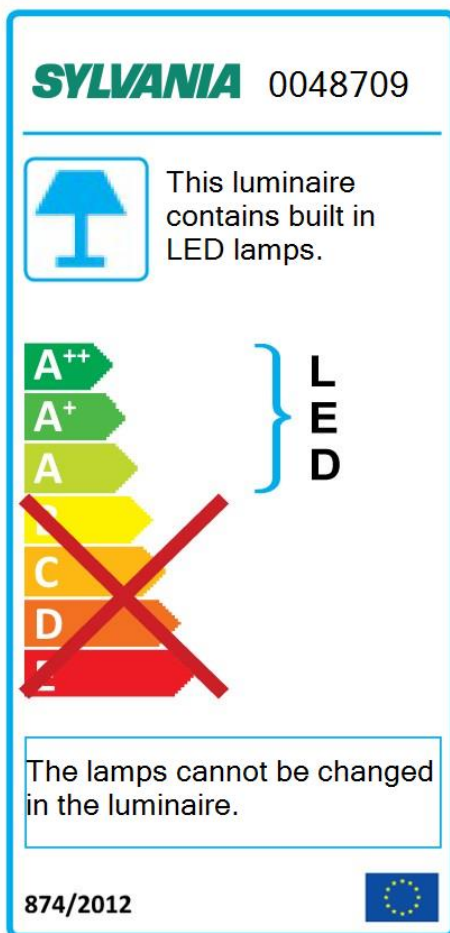

Sylproof Superia LED G3 DALI

SYLPROOF SUPERIA LED G3 1200mm Twin 4K DALI E3

0048709

