

Ascent 150 II Round Aluminium Reflector


ASCENT 150 II 2200 3K STD EM

2059358



Product features

- The ASCENT 150 II 2200 3K STD EM is a high efficient downlight luminaire with luminous flux: 2246lm, luminaire efficacy: 118lm/W, Colour rendering index Ra >80, Colour temperature: 3000K Warm white, Average life rated at 50,000Hrs, Class II, Protection rating IP44/IK02, Cut out dimensions: 176mm, Weight: 2.45kg

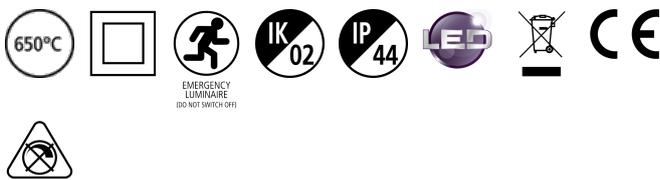

PRODUCT OVERVIEW

IPC Code	2059358
Product name	ASCENT 150 II 2200 3K STD EM
Technology	LED
Housing	Aluminium
Mount	Recessed
Environment	Internal
General application	Hospitality,Office,Retail
Certifications	EUNEW001
ETIM Class	EC001744
Fixture luminous flux (lm)	2246
Luminaire efficacy (lm/W)	118
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Photobiological Risk Group	Exempt Group 0
Total power consumption (W)	19
Electrical protection	Class II
Control gear type	Electronic
Average life (Nominal) (h)	50000
IP rating	IP44
IK rating	IK02
Product EAN number	5025768593583
Luminous flux (emergency) (lm)	352
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2059358
Product name	ASCENT 150 II 2200 3K STD EM
Technology	LED

Ascent 150 II Round Aluminium Reflector

ASCENT 150 II 2200 3K STD EM
2059358

Housing	Aluminium
Mount	Recessed
Environment	Internal
General application	Hospitality,Office,Retail
Certifications	EUNEW001
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	2246
Luminaire efficacy (lm/W)	118
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam angle (Rated) (°)	80
Distribution type	Direct
Photobiological Risk Group	Exempt Group 0
Emergency duration (h)	3

Electrical data

Total power consumption (W)	19
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear type	Electronic
Transformer required	Yes
Inrush Current (A)	45
Inrush Duration (µs)	20
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60/HF
Max. Luminaires per 16A C Breaker	80

Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Lumen maintenance - L90 B20	60000
Lumen maintenance - L90 B10	52000
Average life (Nominal) (h)	50000

Physical data

IP rating	IP44
IK rating	IK02
Diffuser finish	Clear
Nominal Product Width (mm)	189


Ascent 150 II Round Aluminium Reflector ASCENT 150 II 2200 3K STD EM 2059358

Nominal Product Height (mm)	142
Weight (kg)	2.45
Recessed Depth (mm)	142

Packaging


Single packaging type	Carton
Product EAN number	5025768593583
Packaging single length / height (cm)	30.0
Packaging single width (cm)	30.0
Packaging single depth (cm)	20.0
DUN14 (outer)	05025768593583
Units per outer package	1
Packaging outer length / height (cm)	30.0
Packaging outer width (cm)	30.0
Packaging outer depth (cm)	20.0

PHOTOMETRY

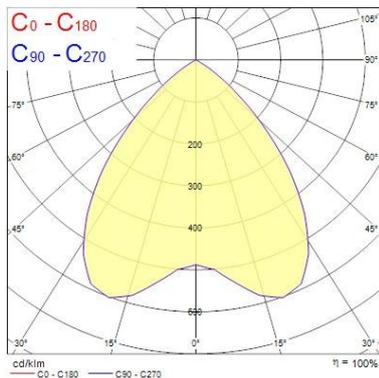

Distance [m]	Cone diameter [m]	E ₀ [lx]	E ₁ [lx]	E ₂ [lx]
0.5	0.89	4360	41.7°	1144
1.0	1.78	1085	41.7°	286
1.5	2.67	482	41.7°	127
2.0	3.56	271	41.7°	72
2.5	4.45	174	41.7°	46
3.0	5.35	121	41.7°	32

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 33.4°)

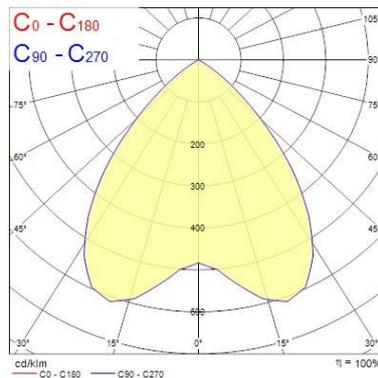


Distance [m]	Cone diameter [m]	E ₀ [lx]	E ₁ [lx]	E ₂ [lx]
0.5	0.89	688	41.8°	177
1.0	1.79	172	41.8°	44
1.5	2.68	76	41.8°	20
2.0	3.58	43	41.8°	11
2.5	4.47	32	41.8°	7
3.0	5.36	19	41.8°	5

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 33.6°)

TECHNICAL DRAWINGS

Ascent 150 II Round Aluminium Reflector *ASCENT 150 II 2200 3K STD EM* 2059358



Concord 2059358

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

Ascent 150 II Round Aluminium Reflector

ASCENT 150 II 2200 3K STD EM
2059358

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

Concord 2059358 874/2012

A++
A+
A
B
C
D
E

LED